

M72PCS

205W/200W/195W/190W

PRODUCT SPECIFICATION



- Industry leading module power output warranty
- International quality, safety and performance certifications
- Manufacturing facility certified to ISO9001 quality management system standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers




WARRANTIES

12 years for product defects in materials & workmanship

12 years for 90% of warranted minimum power output

25 years for 80% of warranted minimum power output

25 years linear warranty

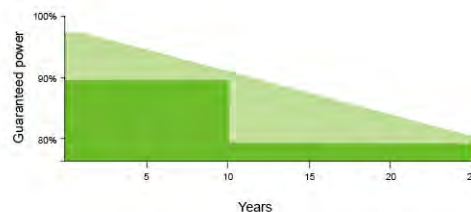

QUALITY DESIGN | GREAT DURABILITY | EASY INSTALLATION



GERMANY COMPANY:
Saronic (EU) Power Tech GmbH
Web: www.saronic.de



CHINA COMPANY:
Qingdao Saronic Power Co., Ltd
Web: www.saronic.com.cn

M72PCS 205W/200W/195W/190W PRODUCT SPECIFICATION

Electrical parameters at standard test conditions
(STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type	205W	200W	195W	190W
Max power(Pmax)	205	200	195	190
Max power voltage(Vmp)	37.8	37.77	37.62	37.44
Max power current(Imp)	5.42	5.29	5.18	5.08
Open circuit voltage(Voc)	45.36	45.25	45.07	44.86
Short circuit current(Isc)	6.12	5.92	5.8	5.68
Cell efficiency(%)	18.75	18.3	17.8	17.3
Module Efficiency(%)	16.06	15.67	15.27	14.88
Max system voltage	DC1000V			
Maximum Series Fuse Rating	15A			

Mechanical Data

Dimensions	1580x808x35mm
Weight	15kgs
Front glass	3.2 mm tempered glass
Output cables	4 mm ² symmetrical lengths 900 mm
Connectors	MC4 compatible IP67
Cell type	Mono Crystalline Silicon 125mmx125mm
Number of cells	72 cells in series

Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.07% / °C
Temp.Coeff.of Voc(TK Voc)	(-0.36%) / °C
Temp.Coeff.of Pmax(TK Pmax)	(-0.38%) / °C
Operating temperature	(-40~+85%) °C
Normal operating cell temperature	45±2°C


Packing Configuration

Container	20'GP	40'GP	40'HQ
Pieces per pallet	66-52	66	74
Pallets per container	6+1	14	14
Pieces per container	448	924	1036


Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001
Certifications	TUV,CE,MCS,PV CYCLE,CEC,CHUBB
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Positive tolerance	0~+3%
Junction box	IP67
Warranties	12 years material and workmanship and 25 years output at least 80%


Dimensions and Structure

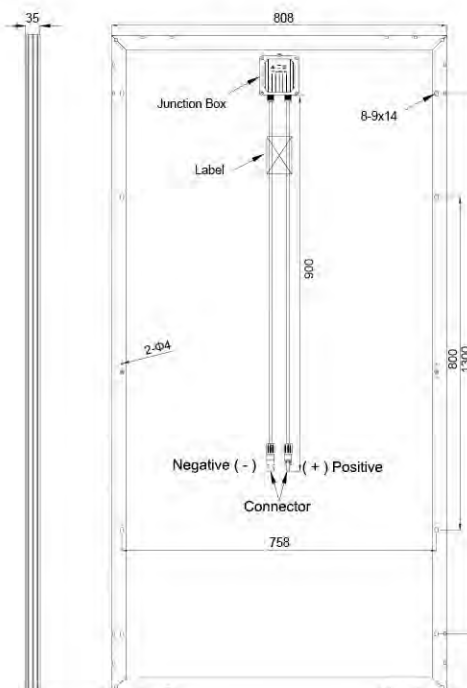

I-V Curve

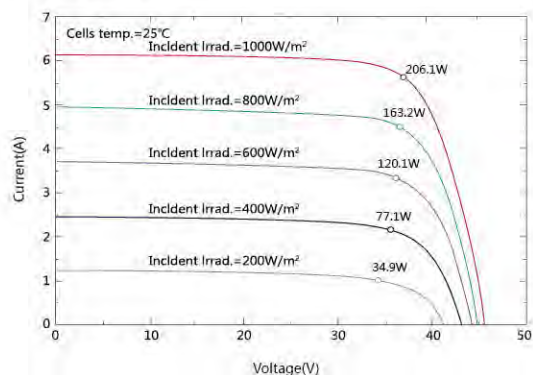

I-V Curves at different irradiance

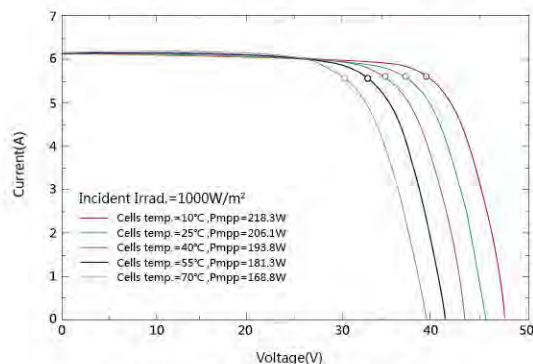

I-V Curves at different temperature



GERMANY COMPANY:
Saronic (EU) Power Tech GmbH
Web:www.saronic.de



CHINA COMPANY:
Qingdao Saronic Power Co.,Ltd
Web:www.saronic.com.cn