
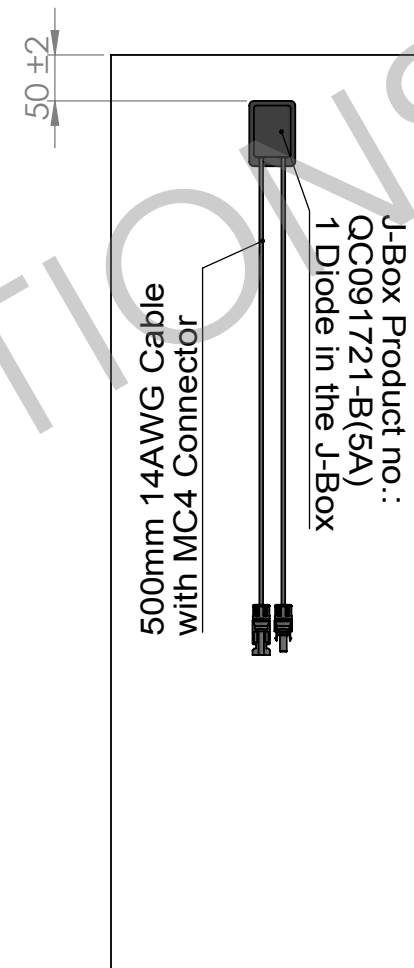


Electric characteristics
Pmax: 50 W
Tolerance: 0%~+5%
Isc: 2.85A
Voc: 22.89V
Imp: 2.70A
Vmp: 18.54V

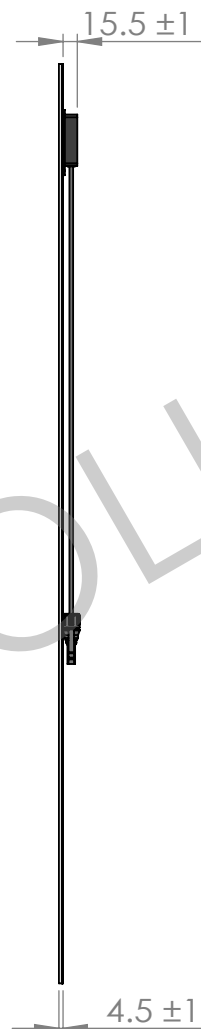

| | | | | | |
|------------------------------------------------------------------------------------------------------|--|--------------------------------------|----------|----------------------------------------------------------------------------------------------------------------------|-------------------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS. TOLERANCES REFERENCE: GB/T1804-E | | NAME | DATE | OPES Solutions Ltd | |
| DRAWN | | GH | 20170125 | TITLE: | |
| CHECKED | | | | <div style="background-color: black; width: 100px; height: 30px; margin-bottom: 5px;"></div> Finished product | |
| ENG APPR. | | | | | |
| MFG APPR. | | | | | |
| Q.A. | | | | | |
| COMMENTS: | | Cell: 6" Poly 3BB or 4BB, eff.>17.8% | | SIZE | DWG. NO. |
| MATERIAL | | | | A | 50W Frameless PV Module |
| FINISH | | | | | REV 1 |
| DO NOT SCALE DRAWING | | | | SCALE:1:8 | WEIGHT: |
| | | | | SHEET 1 OF 1 | |