



Hybrid Inverter

Hyper Series

ST-Hyper-3000TL-Single
ST-Hyper-3680TL-Dual
ST-Hyper-5000TL-Dual

Features

- Nature Convection, IP 65
- Compact "all-in-one" system
- Smart Grid, Back-Up, Off/On Grid
- Intelligent storage management
- Seamless switchover to keep your power on during outage(<8ms UPS level)-Optional
- Simplicity of use and operation
- "Plug&Play" Installation
- Local and remote monitoring

MORE SUN FOR THE HOME

STORING SOLAR ENERGY SIMPLY AND COST-EFFECTIVELY

THE SOLTARO HYPER SERIES HYBRID INVERTER is the right solution for people who want to make their home independent from conventional electric utility companies and rising electricity costs by using intermediate storage for their solar energy. This gives you maximum flexibility both now and in the future.



Higher return on investment

- Cost effective
- Freedom from soaring electricity prices and serious savings
- Harness the continuously improving solar power self-consumption




Intelligence and Flexibility

- Intelligent functionality enables self consumption with solar prioritization, peak shaving and, assisting small generators with heavy loads
- Solar power priority management, increase self-consumption
- Seamless switch over to keep your power on during outage



Easy to service

- Monitor, troubleshoot or upgrade firmware with Soltaro web clouded platform
- Global support and training
- Replaceable boards and spare parts

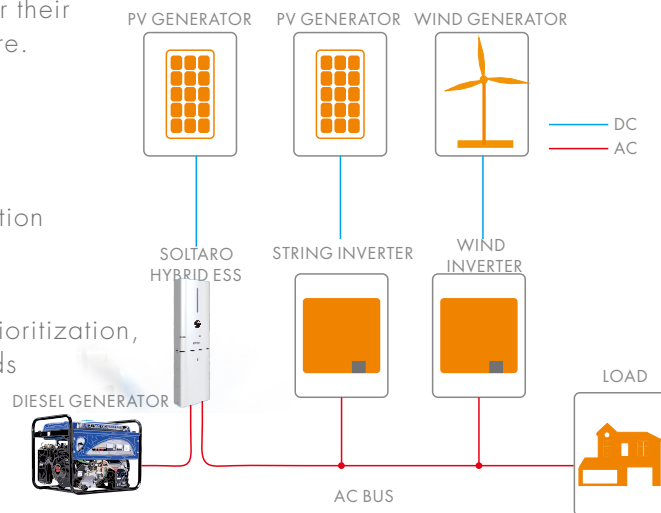

SOLTARO CHINA

B1-416, NO. 200 LINGHU ROAD,
XINWU DISTRICT, WUXI, 214110, CHINA
T: +86 510 8102 6876
E: SALES@SOLTARO.COM.CN

SOLTARO AUSTRALIA

LEVEL 9, 440 COLLINS STREET,
MELBOURNE VIC 3000, AUSTRALIA
T: +61 1300 2 SOLTARO
E: SALES@SOLTARO.COM.AU

SOLTARO UK

UNIT E, ACORN PARK, LENTON LANE INDUSTRIAL ESTATE
NOTTINGHAM, NG7 2TR, UK
T: +44 (0) 115 986 7240
E: SALES@SOLTARO.CO.UK

SOLTARO EUROPE

PORTA PIAZZETTA, 2 GR-6537 SAN VITTORE -
SWITZERLAND
T: +39 335 6263391/+41 76 268 84 20
E: SALES@SOLTARO.EU

Hybrid Inverter-Hyper Series

Technical Specifications

DEVICE SHORT NAME	Hyper-3KW	Hyper-3.68KW	Hyper-5KW
PV STRING INPUT (DC)			
Max. DC Input Power [W]	3900W	4600W	6500W
Max. DC Input Voltage [V]	580V	580V	580V
MPPT Voltage Range [V]	125V~500V	125V~500V	125V~500V
Max. input current [A]	12.0A	11.0A/11.0A	11.0A/11.0A
Max. short circuit current [A]	15.0A	14.0A/14.0A	14.0A/14.0A
NO. of MPP Trackers	1	2	2
Strings per MPP Tracker	2	1	1
Galvanic Isolation for PV Modules	NO	NO	NO
BATTERY INPUT SIDE			
Battery Type	Lead-Acid [⚡] ,Lithium-ion		
Nominal Battery Voltage	48V	48V	48V
Battery Voltage Range	40-60V	40-60V	40-60V
Galvanic Isolation for Battery	YES	YES	YES
Max. Charge Current [⚡]	60A	60A(Optional 75A)	100A
Max. Discharge Current [⚡]	60A	60A(Optional 75A)	100A
Protection	Over Voltage, Less Voltage, Over Current, Short Circuit, Over Temperature		
Depth of Discharge	Lithium-ion: 0~100% DOD Adjustable, Lead-acid: 0~50% DOD Adjustable		
GRID AC OUTPUT(ON-GRID)			
Nominal Apparent Power Output to Utility Grid [VA]	3000 VA	3680 VA	4600 VA
Maximum Apparent Power Output to Utility Grid [VA] [⚡]	3000 VA	3680 VA	5100 VA
Max. Apparent Power from Utility Grid [VA]	6000 VA	7360 VA	9200 VA
Nominal Output Voltage [V]	230 V	230 V	230 V
Nominal Output Frequency [HZ]	50/60 HZ	50/60 HZ	50/60 HZ
Max. AC Current Output to Utility Grid [A]	16 A	16A	24.5 A [⚡]
Max. AC Current From Utility Grid [A]	32 A	32A	40 A
Output Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)		
Output THDi [@Nominal Output]	<3%	<3%	<3%
EPS AC OUTPUT DATA(BACK-UP)			
Max. Output Apparent Power [VA]	3000VA	3680 VA	5000 VA
Peak Output Apparent [VA] [⚡]	4.5KVA, 10S; 9KVA, 100MS	5.52KVA, 10S; 11KVA, 100MS	6.5 KVA, 10S; 15 KVA, 100MS
Max. Output Current [A]	16 A	16 A	21.7 A
Nominal Output Voltage [V]	230(±2%)	230(±2%)	230(±2%)
Nominal Output Frequency [HZ]	50/60(±2%)	50/60(±2%)	50/60(±2%)
Output THDv [@Linear Load]	<3%	<3%	<3%
EFFICIENCY			
MPPT Efficiency	99.9%	99.9%	99.9%
Euro Efficiency	97.0%	97.0%	97.0%
Max. Efficiency	97.8%	97.8%	97.8%
Max. Battery to Load Efficiency	95%	95%	95%
Standby Power Losses	<0.5W	<0.5W	<0.5W
Topology	High Frequency Isolation	High Frequency Isolation	High Frequency Isolation
PROTECTION			
Anti-islanding Protection	YES	YES	YES
PV Sting Input Reverse Polarity Protection	YES	YES	YES
Insulation Resistor Dection	YES	YES	YES
Residual Current Monitoring Unit	YES	YES	YES
Output Over Current Protection	YES	YES	YES
Output Short Protection	YES	YES	YES
Output Over Voltage Protection	YES	YES	YES
GENERAL DATA			
DC Switch	Optional	Optional	Optional
Dimensions(L*W*H)(mm)	480*520*173mm	480*520*173mm	480*520*173mm
Net Weight(KG)	28kg	28kg	35kg
Protection Degree	IP 65	IP 65	IP 65
Mounting Information	Wall Bracket	Wall Bracket	Wall Bracket
Operation Temperature Range [°C]	-20℃~+60℃(45℃ derating)	-20℃~+60℃(45℃ derating)	-20℃~+60℃(45℃ derating)
Noise Emission (typical) [dB]	<25db	<25db	<25db
User Interface	APP	APP	APP
Communication with BMS [⚡]	RS 485 & CAN	RS 485 & CAN	RS 485 & CAN
Communication with Meter	RS 485	RS 485	RS 485
Communication with Portal	Wi-Fi	Wi-Fi	Wi-Fi
Relative Humidity [%]	0~95%	0~95%	0~95%
Site Altitude [m]	<4000m	<4000m	<4000m
Cooling Concept	Natural Convection	Natural Convection	Natural Convection
CERTIFICATIONS& STANDARDS			
Grid Regulation	VDE-AR-N 4105, VDE0126-1-1, AS4777.2, G83/2, G59, CEI 0-21, NRS 097-2-1, En50438		
Safety Regulation	IEC/EN62109-1&2, IEC62040-1		
EMC Standard	EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN61000-4-16, EN61000-4-18, EN61000-4-29		
WARRANTY	5-10 years standard warranty (depend on territory)		

[⚡] Lead-acid battery use refers to Approved Battery Options Statement.

The actual charge and discharge current also depends on the battery.

[⚡] 4600 for VDE 0126-1-1 & VDE-AR-N4105, 4950 for AS4777.2; 4050 for CEI 0-21

[⚡] 21.7A for AS 4777.2

[⚡] Can be reached only if PV and battery power is sufficient

[⚡] The standard configuration is CAN