



product guarantee¹



linear performance
guarantee¹



ECO LINE

P60/250 – 265W

Polycrystalline module family



Longlife tested



Power proofed



Safety provided



Selection of
components



Cross-linking
degree test



Performance surplus
of 0Wp to 6.49 Wp



Imp
sorting



Special packing to
avoid micro cracks
in the cells



German
warrantor

The 60-cell module is the large-size all-rounder among the Luxor solar modules. Eco in this case means especially economical: The high wattage makes the module the ideal solution for industrial scale equipments. From the open-field facilities, through the tracking system, to the roof-mounted installation. High-quality solar cell with highest efficiency at the best possible low light behaviour ensure the best energy output. And this at plus tolerances of 0Wp to 6.49Wp.

Further high-end components: An especially durable plug-in connection guarantees the best power contact under all conditions, and the hollow-section frame made of anodised aluminium and compatible with every assembly system, is torsionally stiff and corrosion-free. Manufactured according to German standards each Luxor solar module is marked by a special level of durability and reliability.

ECO LINE P60/250 – 265W

Polycrystalline module family

Module type LX - XXXP/156-60+ | XXX = Rated power Pmpp

Electrical data at STC

Rated power P _{mp} [Wp]	250.00	255.00	260.00	265.00
P _{mp} range to	256.49	261.49	266.49	271.49
Rated current I _{mp} [A]	8.34	8.42	8.51	8.60
Rated voltage V _{mp} [V]	30.00	30.34	30.65	30.90
Short-circuit current I _{sc} [A]	8.84	8.93	9.01	9.09
Open-circuit voltage U _{oc} [V]	37.29	37.54	37.80	38.06
Efficiency at STC	15.38%	15.71%	16.03%	16.33%
Efficiency at 200 W/m ²	15.04%	15.31%	15.60%	15.90%

Electrical data at NOCT

P _{mp} [Wp]	185.58	189.40	193.17	196.75
Rated current I _{mp} [A]	6.67	6.74	6.81	6.88
Rated voltage V _{mp} [V]	27.82	28.10	28.37	28.61
Short-circuit current I _{sc} [A]	7.07	7.14	7.21	7.28
Open-circuit voltage U _{oc} [V]	34.58	34.78	34.99	35.23

Specification as per STC (Standard test conditions): irradiance 1000 W/m² | module temperature 25°C | AM = 1,5

NOCT (nominal operating cell temperature): irradiance 800 W/m² | wind speed 1 m/sec | temperature 20°C | @45 +/- 2°C | AM = 1,5

Limiting values

Max. system voltage [V]	1000 V
Max. return current [I]	15 A
Temperature range	-40 to 85°C
Snow-load zone ²	approval up to SLZ 3 (according to DIN 1055)
Max. pressure load (static) [Pa]	5400
Max. dynamic load [Pa]	2400

Temperature coefficient

Temperature coefficient [V] [I] [P]	-0,30% /°C 0,05% /°C -0,41% /°C
---	-------------------------------------

Specifications

Number of cells (matrix)	6 x 10, three strings in a row 156 mm x 156 mm
Module dimensions (L x W x H) ² Weight	1640 mm x 992 mm x 35 mm 18.5 kg
Front-side glass	3.2 mm hardened solar glass with low iron content
Frame	stable, anodised aluminium frame in a hollow-section design
Socket	plastic (PPO), ventilated and strain-relieved, at least IP65
Cabel	4 mm ² solar cable, cable length 1.0 m
Diodes	3 Schottky Diodes 15A/45V
Plug-in connection	high-quality plug-in system, (IP67) MC4 or equivalent
Hail test (max. hailstorm)	Ø 45 mm impact velocity 23 m/s

The specifications and average values can vary slightly. What is important is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance: rated power +/- 3%, other values +/- 10%, all information in this data sheet corresponds to DIN 50380. A potential light-induced degradation of the power after commissioning is not considered here, other information can be found in the installation guidelines.


1 The specific warranty conditions are given under www.luxor-solar.com/download.htm

2 For standing installation

3 Tolerance L/W = +/- 3 mm, H = the dimensions given in the order confirmation will be decisive

4 Location on request


Back - / Front -/ Side view³

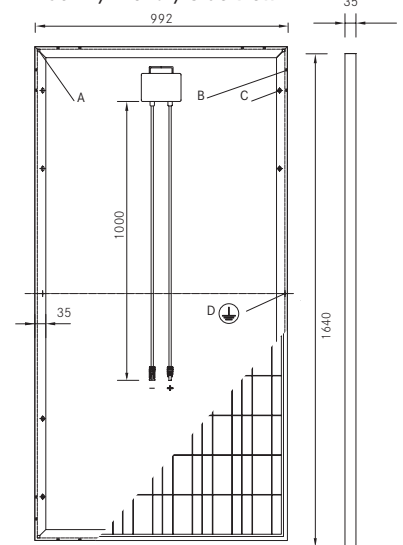


- A: 4 x drainage 10*10 mm
- B: 8 x ventilation aperture 3*7 mm
- C: 8 x mounting hole⁴ d = 7 mm
- D: 2 x earthing d = 2 mm

Electrical characteristics

UI-diagramm e.g. LX-270P/156-60+

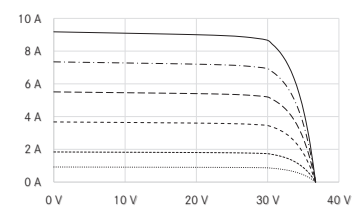

UP-diagramm e.g. LX-270P/156-60+

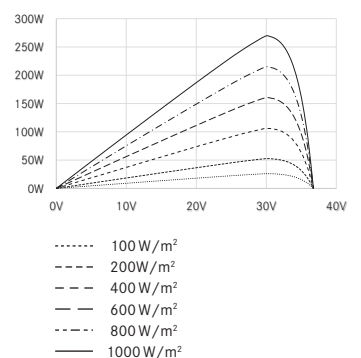

Luxor, your specialised company

Guidelines: 2006/95/EG-2006/95/EC, 89/336/EEG-89/336/EEC, 93/68/EEG-93/68/EEC



IEC
IEC 61215
IEC 61730



The validity of the certificates/listings for a specific country has to be examined under:
www.luxor-solar.com/download.htm