


Phono[®] Solar

MWT Module

Poly-perc/295-310W

- 20W** Higher Efficiency
20W+ higher rated power more than common module
- 3%** Higher Generation
3% higher power generation on the same installation
- \$** Lower Cost
BOS cost can be reduced by 1.2-1.5 USD cent/w
- ◆** Better reliability and Stability
Lower degradation and higher generating capacity ensure better module performance
- ✚** Wider Technical Compatibility
MWT can be combined with most existing manufacturing process and technologies

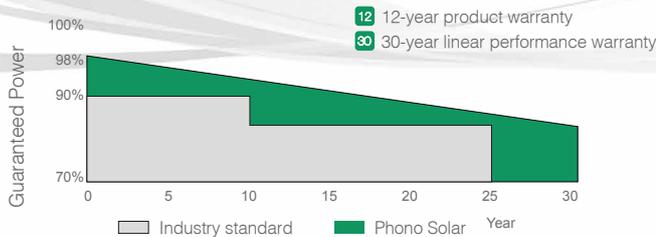

Bloomberg Tier1
NEW ENERGY FINANCE

TOP PERFORMER
2018
DNV-GL
PV MODULE RELIABILITY SCORECARD

TOP PERFORMER

60
Cells



EN EN-20190221

SINOMACH | SUMEC
SUMEC GROUP CORPORATION

ELECTRICAL TYPICAL VALUES

Model	PS295P-20/UM	PS300P-20/UM	PS305P-20/UM	PS310P-20/UM
Type	Polycrystalline 6 inch x 6 inch square, 6 × 10 pieces in series			
Rated Power (Pmpp)	295W	300W	305W	310W
Tolerance	0~+5w			
Rated Current (Impp)	9.40	9.50	9.60	9.69
Rated Voltage (Vmpp)	31.40	31.60	31.80	32.00
Short Circuit Current (Isc)	9.90	9.98	10.06	10.14
Open Circuit Voltage (Voc)	38.80	39.00	39.20	39.40
Module Efficiency (%)	18.13	18.44	18.75	19.05
NOCT (Nominal Operation Cell Temperature)	43.±2°C			
Voltage Temperature Coefficient	-0.28%/°C			
Current Temperature Coefficient	+0.06%/°C			
Power Temperature Coefficient	-0.36%/°C			

MECHANICAL CHARACTERISTICS

Length	1640mm (64.57 inch)
Dimension (L x W x H)	Width: 992mm (39.06 inch) Height: 35mm (1.38 inch)
Weight	18.5kg (40.79 lb)
Front Glass	3.2mm toughened glass
Frame	Anodized aluminium alloy
Cable	4mm ² (IEC) , Length:900mm or Customized length
Junction Box	IP 67 rated

ABSOLUTE MAXIMUM RATING




Parameter	Values
Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Surface Maximum Load Capacity	Up to 5400Pa
Maximum Series Fuse Rating	15A
IEC Application Class (IEC61730)	A
Fire Rating (IEC61730)	C
Module Fire Performance (UL 1703)	Type1
Maximum System Voltage	DC 1000V (IEC)

PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces/Container	312	896

1. In compliance with our warranty terms and conditions.
2. Measurement conditions under irradiance level of Standard Test Conditions(STC): 1000W/m
Air mass 1.5 Spectrum, cell temperature of 25°C.

ELECTRICAL CHARACTERISTICS

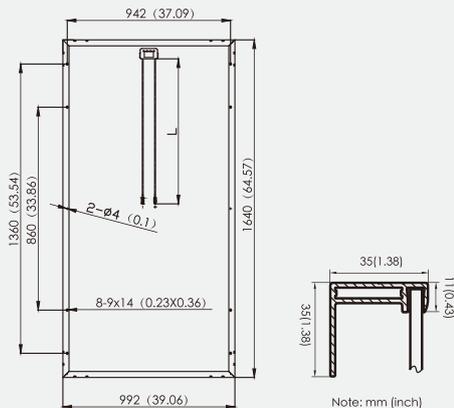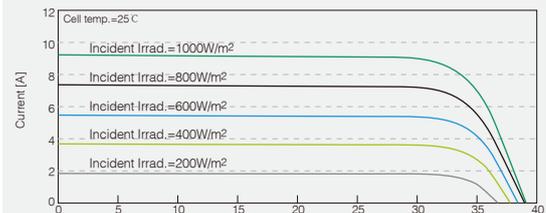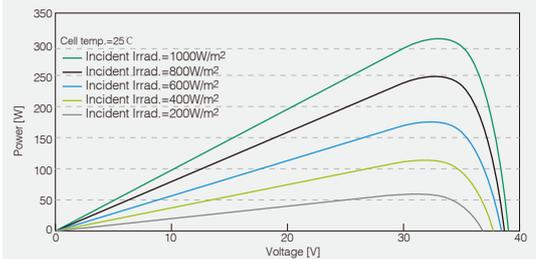

Phono[®] Solar

Note: This datasheet is not legally binding. Phono Solar Technology Co., Ltd. reserves the right to adjust specifications without notice. Further information please refer to our [Website:www.phonosolar.com](http://www.phonosolar.com), [E-mail:info@phonosolar.com](mailto:info@phonosolar.com)