









**Flex Series**

**S-FLEX 6 II · 365-385W**  
MWT Mono PERC Flexible Module

**21.8%**

Module efficiency up to 21.8%

## Features


- 
**Light, Thin design**  
5.7kg weight, 2.5mm thickness, match various requirements for low-load projects
- 
**Ultra Flexible**  
Ultra-thin silicon wafers with advanced organic polymer encapsulation materials, minimum bending radius reach 0.30m, fit all kinds of curved surface perfectly
- 
**High Efficiency And Reliability**  
Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions
- 
**Customizable**  
Customized design for different scenarios
- 
**Convenient Installation**  
Easy installation and convenient transportation with lower cost
- 
**Lead-free**  
Eco-friendly PV design achieves lead-free MWT module without soldering materials

## Reinsurance Coverage for 25 Years

**12 year**  
Quality Warranty

**25 year**  
Performance Warranty

Insured by LLOYD'S  
**LLOYD'S**

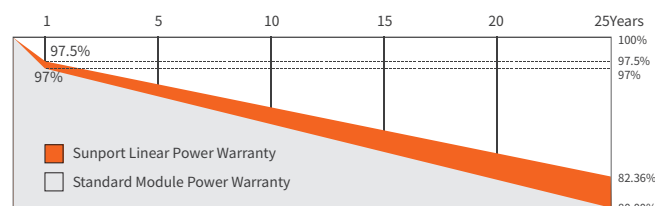


※1st year degradation less than 2.5%, 25 years power output 82.36% guaranteed.

## Comprehensive Qualifications & Certifications

- ★ ISO 9001: 2015 Quality Management System
- ★ ISO 14001: 2015 Environment Management System

- ★ ISO 45001: 2018 Occupation Health Safety Management System



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP365QHES	SPP370QHES	SPP375QHES	SPP380QHES	SPP385QHES
Max Power(Pm)	W	365	370	375	380	385
Power Tolerance	W	0~+5				
Max-Power Voltage(Vm)	V	34.9	35.1	35.3	35.5	35.7
Max-Power Current(I <sub>m</sub> )	A	10.46	10.54	10.62	10.70	10.78
Open-Circuit Voltage(Voc)	V	42.4	42.6	42.8	43.0	43.2
Short-Circuit Current(I <sub>sc</sub> )	A	11.09	11.16	11.23	11.30	11.35
Effective Module Efficiency(η <sub>m</sub> )	%	20.7	21.0	21.2	21.5	21.8
STC: AM-1.5, Irradiation 1000W/m², Module Temperature 25°C Power Tolerance ±3%						

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP365QHES	SPP370QHES	SPP375QHES	SPP380QHES	SPP385QHES
Max-Power(Pm)	W	274	278	282	286	290
Max-Power Voltage(Vm)	V	32.8	33.0	33.2	33.4	33.6
Max-Power Current(I <sub>m</sub> )	A	8.35	8.42	8.49	8.56	8.64
Open-Circuit Voltage(Voc)	V	39.9	40.1	40.3	40.5	40.7
Short-Circuit Current(I <sub>sc</sub> )	A	8.91	8.98	9.05	9.12	9.19
NMOT: Irradiation 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s						

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P <sub>max</sub>	-0.36%/°C
Temperature coefficient of V <sub>oc</sub>	-0.28%/°C
Temperature coefficient of I <sub>sc</sub>	0.06%/°C

Operating Conditions

Max. system voltage	DC1500V(IEC)
Max. series fuse rating	15A
Operating temperature range	-40°C~+85°C


Mechanical Characteristics

Installation Module Dimension (L×W×H)	1840mmx1040mmx2.5mm
Weight	5.7 kg
Back material	Back Sheet(white)
Cell (quantity / material / type / dimensions)	126(21x6) / Mono / Half cell
Encapsulant	POE
Frame	None
Junction box(protection degree)	IP68
Cable (length/cross-section area)	Customizable / 4 mm²
Connector	MC4 Compatible
Bending radius	0.3m

Package


Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HQ	1104	46

Module Size

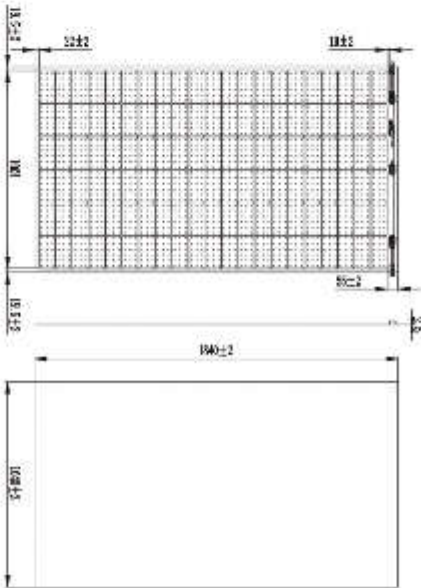

I-V Curve

I-V Curves of SPP375QHES at different irradiance

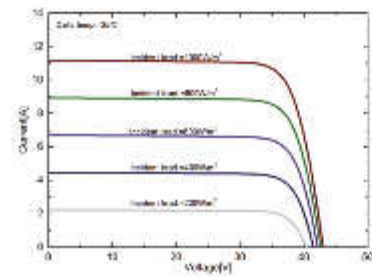

I-V Curves of SPP375QHES at different cell temperature

