


# T4 PV Stecker MC-4 IP68 Wasserdicht



9:25 23/NOV/2015

Product Specifications:	
Product No.	C4D-M001
Rated Voltage	TUV 1000V DC
Rating Current	30A
Suitable Cable Cross Sections	4.0mm <sup>2</sup> ~6.0mm <sup>2</sup>
Pin Dimension	Φ4.0mm
Proof Voltage	6000V AC(1Min)
Pollution Degree	2
Protection Class	Class II
Contact Material	Copper ,Tin Plated
Contact Resistance	≤ 5mΩ
Connector Material	PPO
Degree of Protection IP	IP68(IEC 60529)
Withdrawal Force	≥ 50N
Insertion Force	≤ 50N
Temperature Range	-40°C~+85°C
Flame Class	UL94V-0

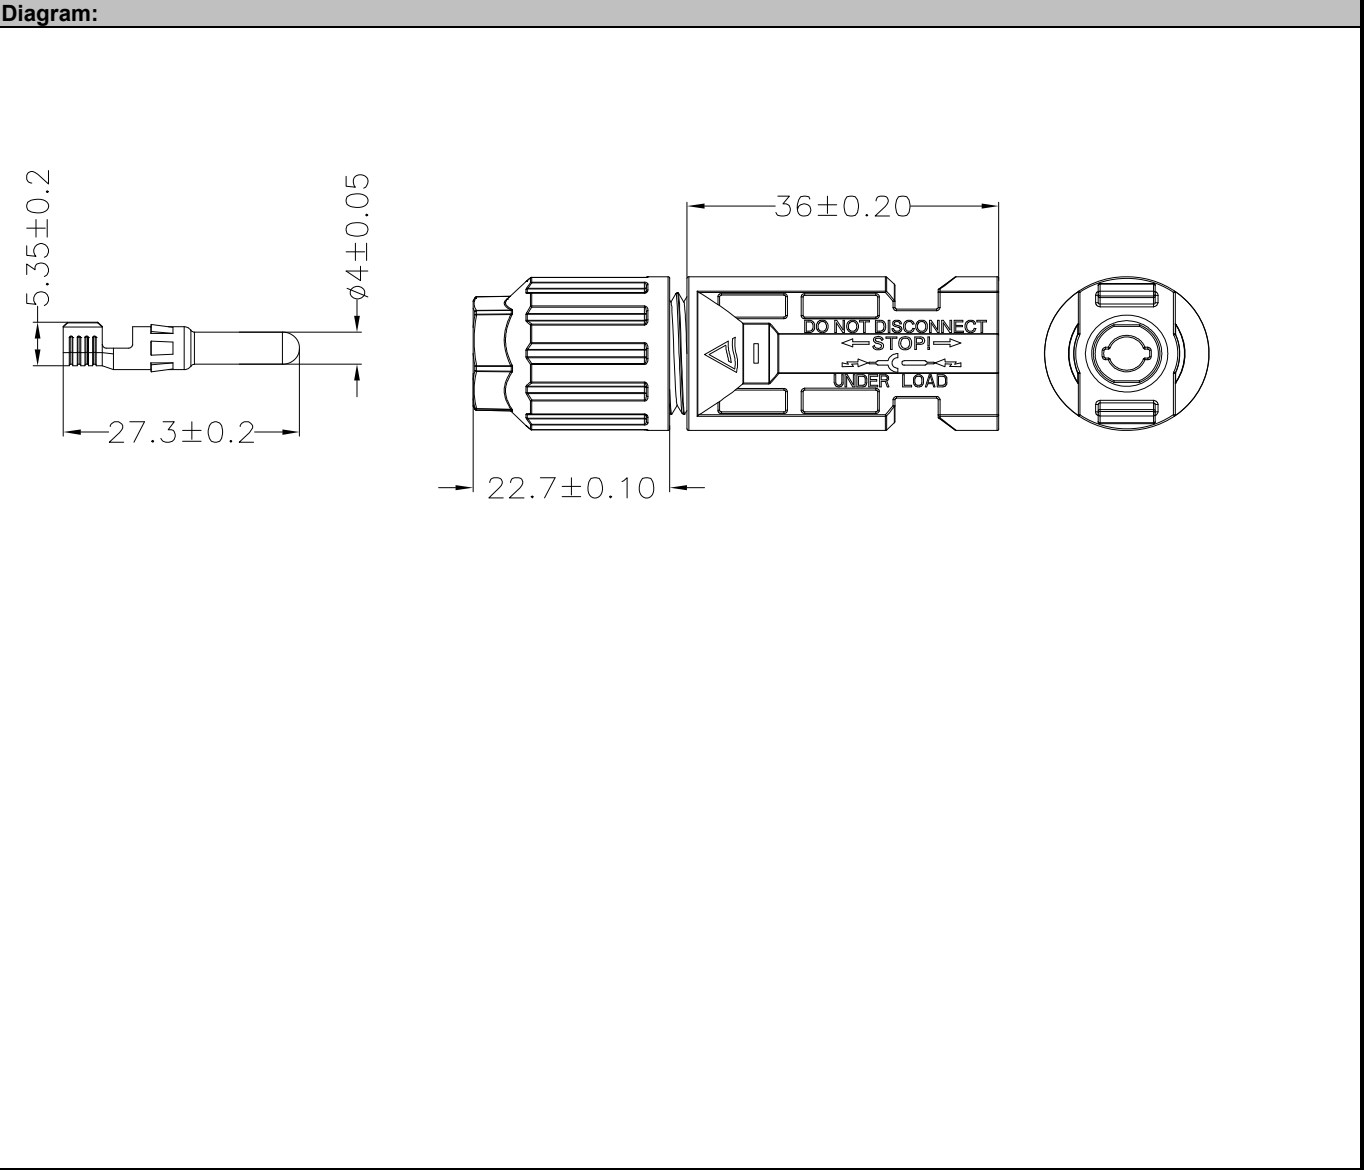

Product Specifications:	
Product No.	C4D-F002
Rated Voltage	TUV 1000V DC
Rating Current	30A
Suitable Cable Cross Sections	4.0mm <sup>2</sup> ~6.0mm <sup>2</sup>
Pin Dimension	Φ4.0mm
Proof Voltage	6000V AC(1Min)
Pollution Degree	2
Protection Class	Class II
Contact Material	Copper ,Tin Plated
Contact Resistance	≤ 5mΩ
Connector Material	PPO
Degree of Protection IP	IP68(IEC 60529)
Withdrawal Force	≥ 50N
Insertion Force	≤ 50N
Temperature Range	-40℃~+85℃
Flame Class	UL94V-0

Diagram:

