


HD HYUNDAI SOLAR MODULE

HeteroMax™ (LE-FB(ZB) Series)

Premium N-Type HJT Monofacial module

HiT-H450LE-FB(ZB) | HiT-H455LE-FB(ZB) | HiT-H460LE-FB(ZB) | HiT-H465LE-FB(ZB) | HiT-H470LE-FB(ZB)

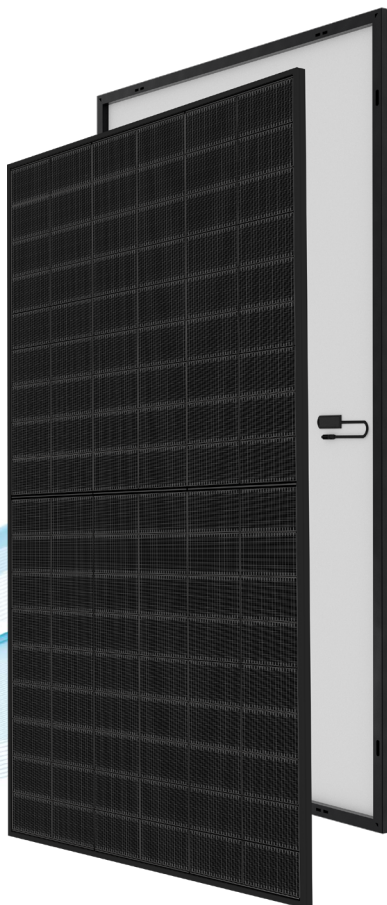

23.5%
High Efficiency



High-End
Heterojunction
Technology



Enhanced Power
Generation with low
Temp. Coefficient



More Power
Generation
In Low Light



For Residential
(Full Black Design)


HD Hyundai's Warranty Provisions

30
YEARS

- 30-Year Product Warranty
- Materials and workmanship

30
YEARS

- 30-Year Performance Warranty
- First year degradation: 1%
- Linear warranty after initial year:
with 0.3%p annual degradation,
90.3% is guaranteed up to 30years

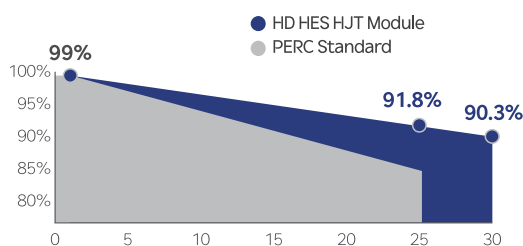

*Refer to HD HES standard warranty for details.

Certification



- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environmental Management System
- ISO 45001:2018: Occupational Health and Safety Management System
- IEC 61215, IEC 61730

Electrical Characteristics (STC*)

HiT-HxxxLE-FB(ZB)						
Item	Unit	450	455	460	465	470
Nominal Output (Pmax)	W	450	455	460	465	470
Open Circuit Voltage (Voc)	V	36.05	36.14	36.23	36.32	36.41
Short Circuit Current (Isc)	A	15.31	15.42	15.53	15.64	15.75
Voltage at Pmax (Vmpp)	V	31.16	31.25	31.34	31.43	31.52
Current at Pmax (Impp)	A	14.55	14.66	14.77	14.88	14.99
Module Efficiency	%	22.5	22.7	23.0	23.2	23.5
Power Selection	W	0~+5				
Temperature Coefficient of Pmax	%/°C	-0.24				
Temperature Coefficient of Voc	%/°C	-0.22				
Temperature Coefficient of Isc	%/°C	0.04				

*STC : Irradiance 1,000 W/m², cell temperature 25°C, AM=1.5 / Test uncertainty for Pmax ±3%; Voc ±3%; Isc ±4%

NMOT

Item	Unit	450	455	460	465	470
Nominal Output (Pmax)	W	349	352	356	360	363
Open Circuit Voltage (Voc)	V	35.64	35.73	35.82	35.91	35.99
Short Circuit Current (Isc)	A	11.91	11.99	12.08	12.16	12.25
Voltage at Pmax (Vmpp)	V	30.81	30.89	30.98	31.07	31.16
Current at Pmax (Impp)	A	11.32	11.40	11.49	11.57	11.66

**NMOT: Irradiancia 800 W/m², Temperatura ambiente 20°C, Velocidad del viento 1 m/s.


Mechanical Characteristics

Dimensions	1,762 mm (L) x 1,134 mm (W) x 30 mm (H)
Weight	21 kg
Solar Cells	N-Type HJT, 96 (6x16) monocrystalline half-cut bifacial cells
Output Cables	Cable : 4mm ² / 12AWG / (+)1,250 mm, (-)1,250 mm / Customized length Connector : Original Stäubli MC4 or MC4-EVO2A
Junction Box	3-part, 3 bypass diodes, IP68 rated
Construction	Front : 1.6mm Double-coated Rolled Toughened Rear : 1.6mm 3-hole Ultra-white Rolled Toughened Glass
Frame	Black Anodized aluminum alloy

Shipping Configurations

Container Size (HC)	40	Modules Per Pallet (pcs)	36
Pallets Per Container (pcs)	26	Modules Per Container (pcs)	936

Module Diagram (unit : mm)

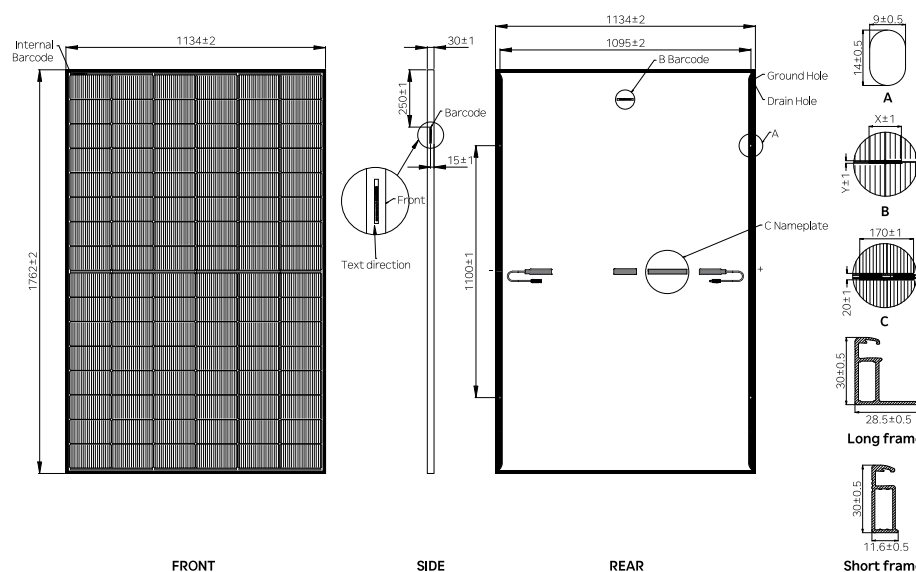

Installation Safety Guide

- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Module Operation Temperature	44°C ± 2°C
Operating Temperature	-40°C~+85°C
Maximum System Voltage	DC 1,500 V
Maximum Reverse Current	30A
Maximum Test Load	Front 5,400Pa Rear 2,400Pa

I-V Curves (HiT-H460LE-FB(ZB))

