

# Standard Series TSP-72H

Trunsun High Efficiency Polycrystalline Solar Module (1500V)

325-340W



## Approved Technology

Approved practice for different operating conditions



## Positive Tolerance

Positive tolerance brings more power for free



## Mechanical Load Endurance

Excellent mechanical load resistance: wind loads (2400Pa) & snow loads (5400Pa)



## Guaranteed Reliability Against Harsh Environment


Due to Complicated Quality control system, offer survival solar module in harsh environment



## 1500V System Voltage

Approved IEC1500Vdc system voltage, saving on BoS cost

## LINEAR PERFORMANCE WARRANTY

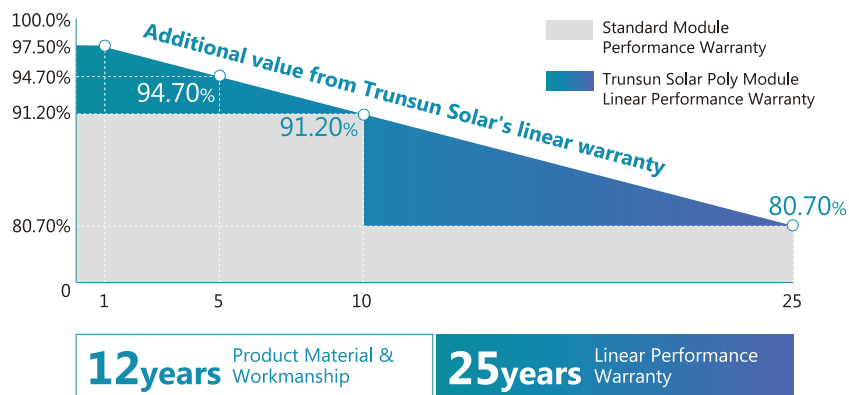

**TRUNSUN SOLAR**

Never stop exceeding

### About Trunsun Solar

Trunsun Solar, established in 2008, is dedicated to providing solar products with high quality, excellent performance and strong after-sales support. The company not only has strong financial support but also never stops innovating. Trunsun Solar will keep delivering the diversified solar products for all kinds of renewable energy generation systems around the world.

[www.trunsunsolar.com](http://www.trunsunsolar.com)

# Standard Series TSP-72H

Trunsun High Efficiency  
Polycrystalline Solar Module (1500V)

## ELECTRICAL DATA @ STC\*

		TSP325-72H	TSP330-72H	TSP335-72H	TSP340-72H
Peak Power (Pmax)	(W)	325	330	335	340
Maximum Power Voltage (Vmp)	(V)	37.75	38.11	38.38	38.6
Maximum Power Current (Imp)	(A)	8.61	8.66	8.73	8.81
Open-circuit Voltage (Voc)	(V)	45.68	45.96	46.24	46.51
Short-circuit Current (Isc)	(A)	9.14	9.2	9.46	9.57
Module Efficiency	(%)	16.8	17.0	17.3	17.5
Operating Temperature		-40°C~+85°C			
Maximum System Voltage		1500V			
Maximum Series Fuse Rating		15A			
Application Class		Class A			
Power Tolerance		0~+3%			

\*STC (Standard Test Condition): Irradiance 1000W/ m<sup>2</sup>, Module Temperature 25°C, AM 1.5

## ELECTRICAL DATA @ NMOT\*

Peak Power (Pmax)	(W)	241	244	248	252
MPP Voltage (Vmp)	(V)	34.85	35.18	35.43	35.63
MPP Current (Imp)	(A)	6.91	6.95	7.01	7.07
Open Circuit Voltage (Voc)	(V)	42.91	43.18	43.44	43.69
Short Circuit Current (Isc)	(A)	7.40	7.45	7.66	7.75

\*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

## TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.41%
Temperature coefficient of Voc	-0.33%
Temperature coefficient of Isc	0.05%
NMOT	43±3°C

## MECHANICAL DATA


Cell Type	Poly-Crystalline, 6" inch
Cell Arrangement	72pcs (6×12)
Dimension (L×W×H)	1956×991×40mm
Weight	22kg
Front Cover	3.2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67, 3 Bypass Diodes
Cable Type	4mm <sup>2</sup>
Length of Cable	1200mm
Connector	PV Connector

## PACKING MANNER



Packing Type	40HQ
Piece/Pallet	27
Pallet/Container	24
Piece/Container	648

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Zhejiang Trunsun Solar Co., Ltd. Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

## Current-Voltage Curve under different irradiance

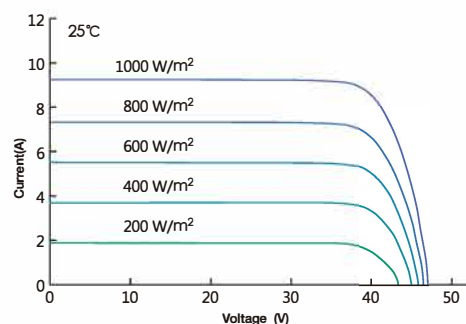

## Current-Voltage Curve under different working temperatures

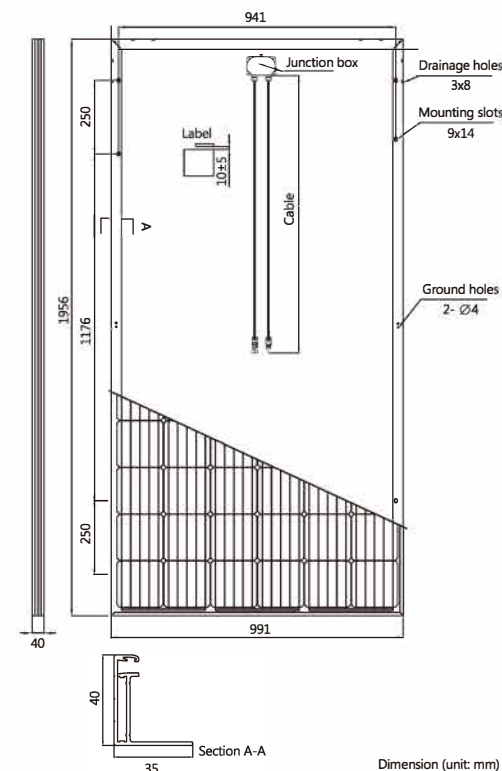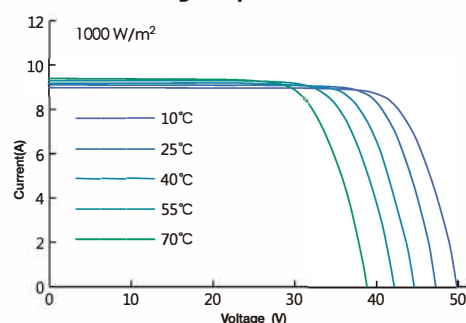

Dimension (unit: mm)

Version 2018.12 © Zhejiang Trunsun Solar Co., Ltd All Rights Reserved.

**Headquarters** # 800, Zhenbei Road, Zhili Town, Wuxing District, Huzhou, 313000, Zhejiang Province, CHINA

**Marketing Center** Room 0306, #3 SOHO Building, #968 Jinzhong Road, Changning District, 200335, Shanghai, CHINA

**Overseas Factory** Lot IV.1 & IV.4.2 Thuan Thanh Industrial Zone 3, Thanh Khoung Commune, Thuan Thanh District, Bac Ninh Province, Vietnam