


**Mono**

## 350W MBB Half-Cell Module JAM60S10 330-350/MR Series

### Introduction

Assembled with multi-busbar PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.

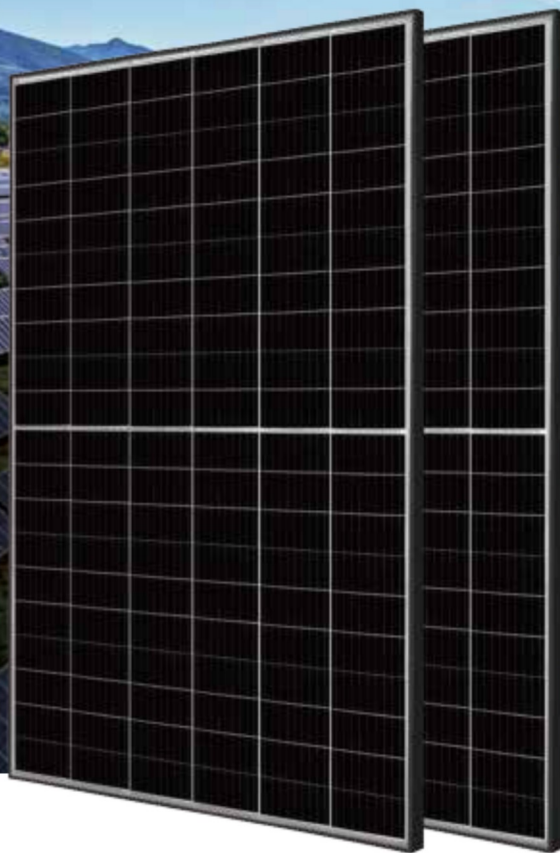

Higher output power



Lower LCOE




Less shading and lower resistive loss



Better mechanical loading tolerance

### Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

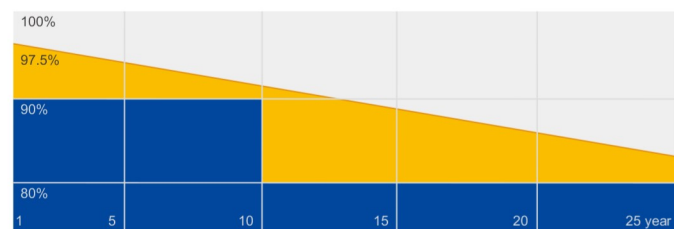


■ JA Linear Power Warranty ■ Industry Warranty

### Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



## MECHANICAL DIAGRAMS

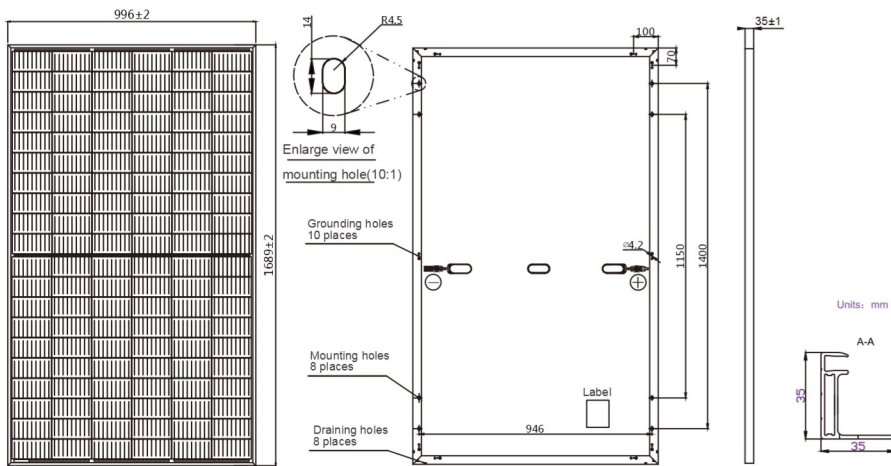

Remark: customized frame color and cable length available upon request

## SPECIFICATIONS

Cell	Mono	
Weight	18.7kg±3%	
Dimensions	1689±2mm×996±2mm×35±1mm	
Cable Cross Section Size	4mm <sup>2</sup>	
No. of cells	120(6×20)	
Junction Box	IP68, 3 diodes	
Connector	MC4 Original	QC 4.10(1000V) QC 4.10-35(1500V)
Cable Length (Including Connector)	Portrait:300mm(+)/400mm(-); Landscape:1000mm(+)/1000mm(-)	
Packaging Configuration	31 Per Pallet	

## ELECTRICAL PARAMETERS AT STC

TYPE	JAM60S10 -330/MR	JAM60S10 -335/MR	JAM60S10 -340/MR	JAM60S10 -345/MR	JAM60S10 -350/MR
Rated Maximum Power(P <sub>max</sub> ) [W]	330	335	340	345	350
Open Circuit Voltage(V <sub>oc</sub> ) [V]	41.08	41.32	41.55	41.76	42.02
Maximum Power Voltage(V <sub>mp</sub> ) [V]	34.24	34.48	34.73	34.99	35.25
Short Circuit Current(I <sub>sc</sub> ) [A]	10.30	10.38	10.46	10.54	10.62
Maximum Power Current(I <sub>mp</sub> ) [A]	9.64	9.72	9.79	9.86	9.93
Module Efficiency [%]	19.6	19.9	20.2	20.5	20.8
Power Tolerance	0~+5W				
Temperature Coefficient of I <sub>sc</sub> ( $\alpha_{Isc}$ )	+0.044%/°C				
Temperature Coefficient of V <sub>oc</sub> ( $\beta_{Voc}$ )	-0.272%/°C				
Temperature Coefficient of P <sub>max</sub> ( $\gamma_{Pmp}$ )	-0.350%/°C				
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G				


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

## ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM60S10 -330/MR	JAM60S10 -335/MR	JAM60S10 -340/MR	JAM60S10 -345/MR	JAM60S10 -350/MR	OPERATING CONDITIONS	
Rated Max Power(P <sub>max</sub> ) [W]	249	253	257	261	265	Maximum System Voltage	1000V/1500V DC(IEC)
Open Circuit Voltage(V <sub>oc</sub> ) [V]	38.46	38.68	38.90	39.09	39.31	Operating Temperature	-40°C~+85°C
Max Power Voltage(V <sub>mp</sub> ) [V]	32.02	32.21	32.40	32.61	32.84	Maximum Series Fuse	20A
Short Circuit Current(I <sub>sc</sub> ) [A]	8.21	8.28	8.35	8.42	8.49	Maximum Static Load,Front	5400Pa
Max Power Current(I <sub>mp</sub> ) [A]	7.78	7.85	7.93	8.00	8.07	Maximum Static Load,Back	2400Pa
NOCT	Irradiance 800W/m <sup>2</sup> , ambient temperature 20°C, wind speed 1m/s, AM1.5G					NOCT	45±2°C
						Safety Class	Glass II

## CHARACTERISTICS

Current-Voltage Curve JAM60S10-335/MR



Power-Voltage Curve JAM60S10-335/MR



Current-Voltage Curve JAM60S10-335/MR

