

# Powerful performance – high stability.

## Bosch Solar Module c-Si M 60

### EU43117 I 43123

**High-quality – high-performance – reliable.**  
Solar modules from Bosch Solar Energy.



**BOSCH**



#### Our crystalline solar modules offer impressive features including:

- ▶ Excellent quality assured through use of the best European-standard components
- ▶ Excellent processing and long-term stability right along the value-added chain
- ▶ Higher specific yields due to positive power sorting

#### Our certificates – quality stamped in writing

Bosch Solar Energy modules go through strict quality tests during the different stages of production according to international standards.



• Qualified IEC 61215  
• Safety tested, IEC 61730  
• Salt corrosion resistance tested  
• Ammonia resistance tested  
• Periodic inspection



#### Quality

Salt corrosion resistance tested,  
5400 Pa superimposed load/2400 Pa  
suction load



#### Product features

Performance sorting  $-0/+4.99$  Wp  
Temperature coefficient  $P_{mpp} -0.44\%/K$



#### Value chain

Crystal – Wafer – Cell – Module



#### Components

Antireflective glass, MC 4,  
Bosch Solar Cell M 3BB



#### Warranty

10 years product and  
25 years performance guarantee  
(90% up to 10 years, 80% up to 25 years)



#### Power classes

250–260 Wp

Length [x]	Width [y]	Height [z]	Weight	Junction box	Plug connector type	Cable [l]	Front glass surface
1660.0	990.0	50.0	21	Spelsberg	MC4	-800 +1 200	Antireflective glass
x, y, l in mm, ±2; z in mm, ±0.3; weight in kg ±0.5							

Crystalline solar module	
Performance classes	250 Wp, 255 Wp, 260 Wp
Performance sorting	-0/+4.99 Wp
Structure	Glass-foil laminate ► Anodized aluminum frame ► Junction box (IP65) with 3 bypass diodes ► Weather-resistant back sheet (white)
Cells	60x monocrystalline solar cells in 156 mm x 156 mm format
Mechanical load	5400 Pa superimposed load, 2400 Pa suction load, in accordance with IEC 61215 (extended test)


### Electrical characteristics for STC<sup>1</sup>:

Designation	P <sub>mpp</sub> [Wp]	V <sub>mpp</sub> [V]	I <sub>mpp</sub> [A]	V <sub>oc</sub> [V]	I <sub>sc</sub> [A]	Reverse-current load capacity [A]
M260 3BB	260	31.30	8.40	38.50	8.95	17
M255 3BB	255	30.90	8.35	38.10	8.90	17
M250 3BB	250	30.40	8.30	37.70	8.85	17
Reduction in module efficiency with decrease in irradiation level from 1000 W/m² to 200 W/m² (at 25 °C): -0.33% (absolute); measuring tolerance P <sub>mpp</sub> ±3%; other parameters ±5%						

### Electrical characteristics for NOCT<sup>1</sup>:

Designation	P <sub>mpp</sub> [W]	V <sub>mpp</sub> [V]	V <sub>oc</sub> [V]	I <sub>sc</sub> [A]
M260 3BB	187	28.39	35.64	7.20
M255 3BB	184	28.03	35.27	7.16
M250 3BB	180	27.67	34.90	7.12
NOCT: Normal Operation Cell Temperature 48.4 °C; Irradiation level 800 W/m², AM 1.5, temperature 20 °C, wind speed 1 m/s, electrical open circuit operation				

### Dimensions<sup>2</sup>:

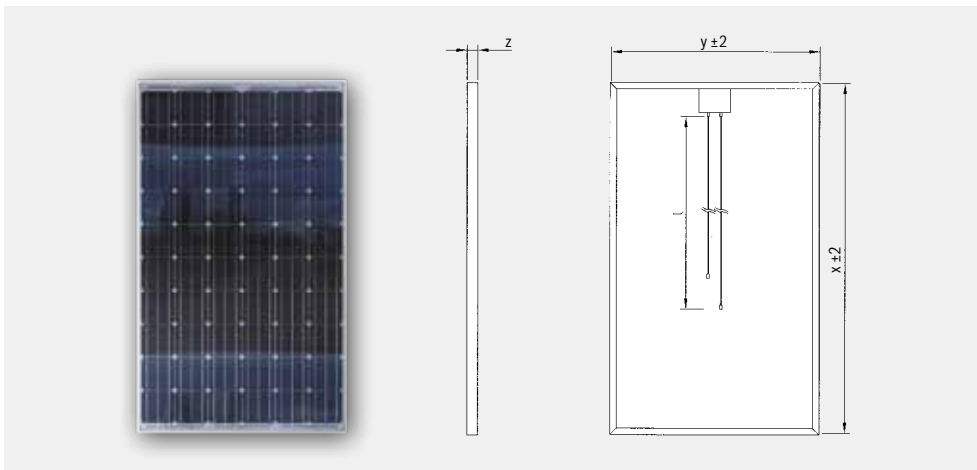

<sup>1</sup> Electrical parameters are typical mean values from historical production data. No guarantee is made for the accuracy of this data for future production batches.

<sup>2</sup> Drawings are not to scale. For detailed dimensions and tolerances, see above.

### Notes on assembly:

- See installation and operating manual at: [www.bosch-solarenergy.com](http://www.bosch-solarenergy.com)
- Horizontal and vertical assembly possible
- System voltage max. 1000 V
- Operating temperature range -40 to 85 °C

### Weak light performance:

Intensity [W/m²]	V <sub>mpp</sub> [%]	I <sub>mpp</sub> [%]
800	0.0	-20
600	-0.1	-40
400	-1.3	-60
200	-3.6	-80
100	-7.2	-90
The electrical data applies for 25 °C and AM 1.5.		

### Thermal characteristics:

Temperature coefficient	TK [%/K]
P <sub>mpp</sub>	-0.44
U <sub>oc</sub>	-0.31
I <sub>sc</sub>	0.031

### Bosch Solar Energy AG

Robert-Bosch-Straße 1  
99310 Arnstadt  
Germany  
Phone: +49 (0)3628 6644-0  
Fax: +49 (0)3628 6644-1133  
[sales.se@de.bosch.com](mailto:sales.se@de.bosch.com)  
[www.bosch-solarenergy.com](http://www.bosch-solarenergy.com)