


3BB HR-240P-18/Bb—HR-265P-18/Bb

Poly-Crystalline Silicon Module

Authorized Partner:
AARON Energy GmbH
info@aaroney.net
www.aaroney.net

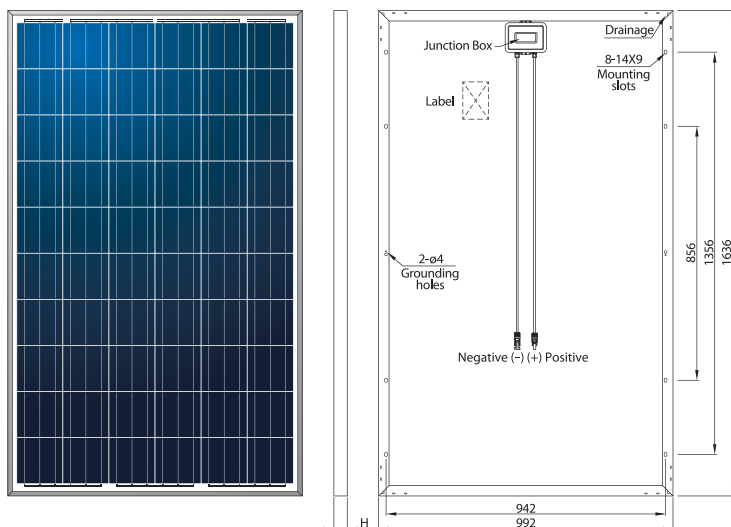

MECHANICAL PARAMETERS

Cell (mm)	156×156 Poly
Weight (kg)	19.0/19.3
Dimensions (L×W×H) (mm)	1636×992×35/40
Cable Cross Section Size (mm ²)	4
No. of Cells and Connections	60(6×10)
No. of Diodes	3

QUALIFICATION

Max. System Voltage	1000VDC
Temperature Cycling Range	-40°C~+85°C
Max. Series Fuse	15 A
Max. Wind Load / Max. Snow Load	2400Pa / 5400Pa
Damp Heat Test	85°C and 85% relative humidity for 1000h
Hot Spot Free	100%EL inspection before and after lamination



ELECTRICAL PARAMETERS

TYPE	HR-240W	HR-245W	HR-250W	HR-255W	HR-260W	HR-265W
STC AM 1.5, 1000W/m ² , Module Temperature 25°C	Rated Max. Power at STC (W)	240	245	250	255	260
	Max. Power Voltage / Vmp (V)	29.67	29.88	29.98	30.25	30.51
	Max. Power Current / Imp (A)	8.09	8.20	8.34	8.43	8.52
	Open Circuit Voltage / Voc (V)	37.25	37.34	37.41	37.54	37.65
	Short Circuit Current / Isc (A)	8.48	8.63	8.79	8.94	9.09
	Module Efficiency (%)	14.79	15.10	15.40	15.71	16.02
NOCT AM 1.5, 800W/m ² , Ambient Temperature 20°C, Wind Speed 1m/s	Rated Max. Power at NOCT (W)	173.0	176.7	180.4	184.1	187.5
	Max. Power Voltage / Vmp (V)	27.50	27.60	27.70	27.80	27.90
	Max. Power Current / Imp (A)	6.29	6.40	6.51	6.62	6.72
	Open Circuit Voltage / Voc (V)	33.90	34.00	34.10	34.20	34.30
	Short Circuit Current / Isc (A)	6.86	6.98	7.11	7.23	7.35
	Module Efficiency (%)	13.32	13.61	13.89	14.18	14.44
Temperature Coefficient of Pm	-0.44%/°C					
Temperature Coefficient of Voc	-0.32%/°C					
Temperature Coefficient of Isc	+0.055%/°C					
Nominal Operating Cell Temperature	45°C±3°C					
Output Tolerance	0~5W					

PACKING CONFIGURATION

MODULE SIZE	CONTAINER	20'GP	40'HC
1636×992×35	Pieces Per Pallet	28	28
	Pallets Per Container	6	28
	Pieces Per Container	168	784
	Pieces Per Pallet	25	25
1636×992×40	Pallets Per Container	6	28
	Pieces Per Container	150	700

250W CURVES

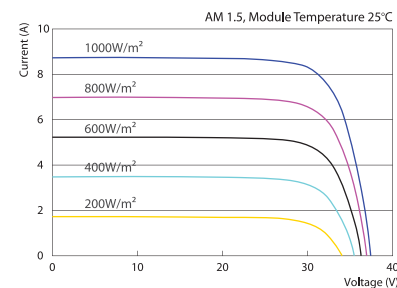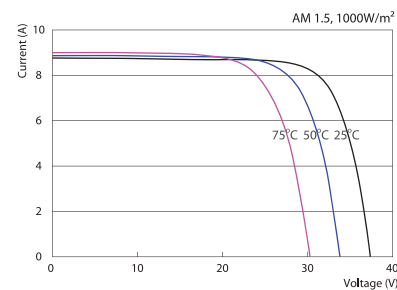

LINEAR WARRANTY

- No more than 3% peak power degradation in 1st year;
- No more than 0.7% peak power degradation in coming 24 years;
- Free from defects of materials and workmanship for 10 years.