

## ET<sup>+</sup> MODULE

ET-M572180	180Wp	ET-M572160	160Wp
ET-M572175	175Wp	ET-M572155	155Wp
ET-M572170	170Wp	ET-M572150	150Wp
ET-M572165	165Wp		

### EFFICIENCY

- Low voltage-temperature coefficient ensures high-temperature operation
- Exceptional low-light performance combined with high sensitivity to light enables excellent energy delivery

### MATERIALS

- Highest quality, high-transmission tempered glass provides enhanced stiffness and impact resistance
  - Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation
  - A sturdy, anodized aluminum frame allows modules to be easily roof-mounted with a variety of standard mounting systems
  - Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
  - Innovative packaging methods in place now use plastic clips ensuring modules arrive in perfect condition
  - New frame design incorporating hexagonal shaped drainage holes, with more grounding holes
- Provide flexible installation and use

### BENEFITS

- Manufactured in an ISO 9001:2000 certified plant
- High efficiency, high safety, high reliability
- Output power tolerance of +/-3%
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship



**ET SOLAR GROUP** [www.etsolar.com](http://www.etsolar.com)

#### ET Solar China

24F, A2 World Trade Center Mansion,  
67 Shanxi RD, Nanjing 210009, China  
Tel: +86 25 8689 8096 Fax: +86 25 8689 8097  
Email: [sales@etsolar.com](mailto:sales@etsolar.com)

#### ET Solar USA

4900 Hopyard Road, Suite 290,  
Pleasanton, CA 94588, USA  
Tel: +1 925 4609 898 Fax: +1 925 4609 929  
Email: [sales@etsolar.us](mailto:sales@etsolar.us)

#### ET Solar Europe

Stefan-George-Ring 29, D-81929 Munich, Germany  
Tel: +49 89 309040 263 Fax: +49 89 309040 264  
Email: [sales@etsolar.de](mailto:sales@etsolar.de)  
(Italy Office) Tel: +39 392 2340606 Email: [sales@etsolar.it](mailto:sales@etsolar.it)

# ET Module


ET-M572180 ET-M572175 ET-M572170 ET-M572165 ET-M572160 ET-M572155 ET-M572150

## SPECIFICATIONS

Model type	ET-M572180	ET-M572175	ET-M572170	ET-M572165	ET-M572160	ET-M572155	ET-M572150
Peak power(Pmax)	180W	175W	170W	165W	160W	155W	150W
Cell type	MonoCrystalline Silicon, 125mm x 125mm						
Number of cells	72 cells in a series						
Weight	15.5 kg (34.2 lbs.)						
Dimensions	1580×808×50 mm(62.2×31.8×2 inch)						
Maximum power voltage (Vmp)	36.30V	36.24V	36.13V	35.80V	35.62V	35.20V	34.50V
Maximum power current (Imp)	4.95A	4.83A	4.71A	4.60A	4.49A	4.40A	4.35A
Open circuit voltage (Voc)	44.60V	44.25V	44.16V	44.12V	43.90V	43.30V	43.30V
Short circuit current (Isc)	5.61A	5.50A	5.30A	5.19A	5.07A	4.98A	4.79A
Maximum system voltage	DC 1000V						
Temp. Coeff. of Isc (TK Isc)	0.058 %/°C						
Temp. Coeff. of Voc (TK Voc)	-0.367 %/°C						
Temp. Coeff. of Pmax (TK Pmax)	-0.485 %/°C						
Normal Operating Cell Temperature	44.4±2 °C						


Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25 °C.

## PHYSICAL CHARACTERISTICS Unit:mm(inch)

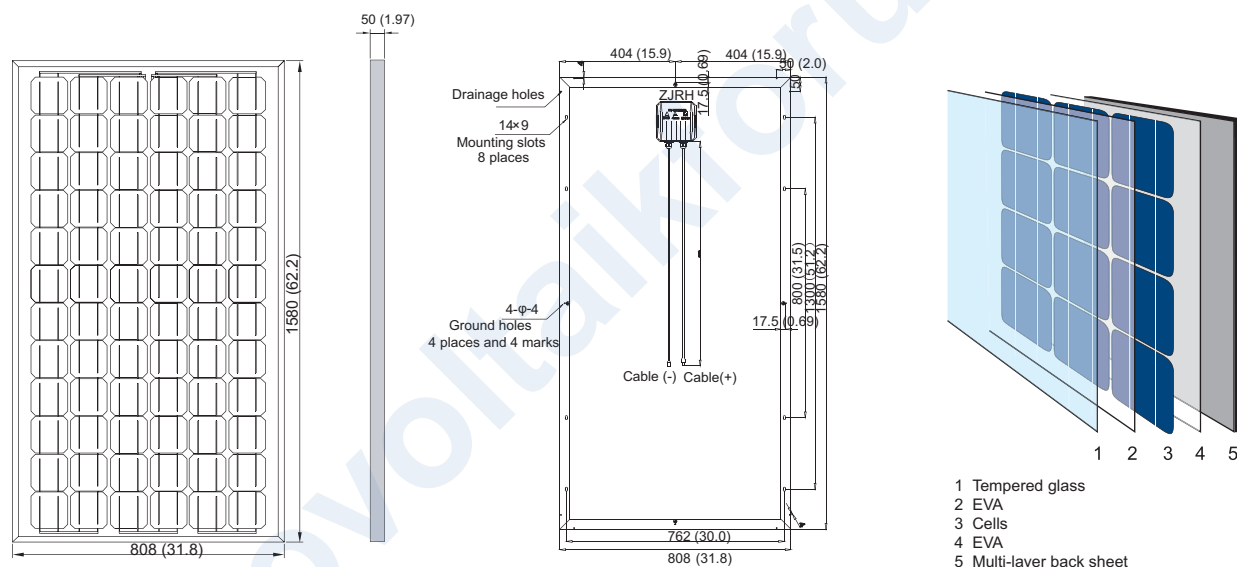


## ELECTRICAL CHARACTERISTICS

Electrical performance cell temperature:25°C

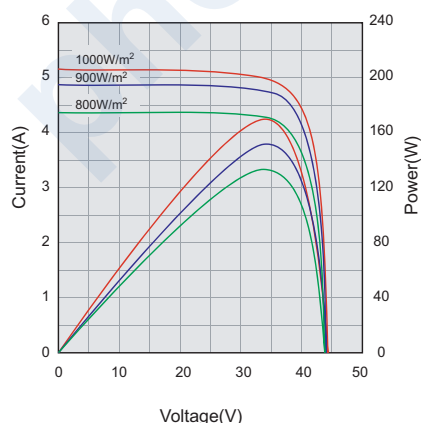

Temperature dependence of Isc, Voc and Pmax

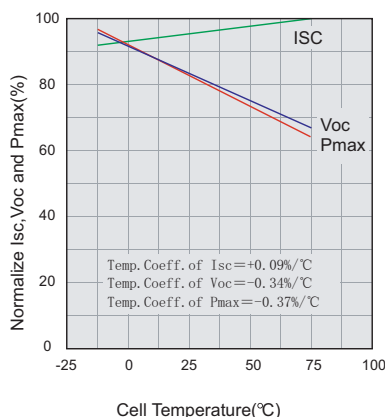

Irradiance dependence of Isc, Voc and Pmax cell temperature:25°C

