

BesTank[®]

International



**Changeable Membrane
Potable Water
Pressure Tank Series**

**8/10/16/25 Bar
2 lt - 10.000 lt**

供水系列

**With Italian
Membrane**

配置意大利
进口内胆



ISO
9001:2008
REGISTERED



Changeable Mebrane Potable Water Pressure Tank Series

BESTANK供水系列专用压力罐



Fresh-hygienic water is the most important need of the humans today . We have to bring the water to our houses with the city network line in a way that the water does not damages its hygienic features. For this reason, in the buildings, factories and other places where hydrophore systems are used, it is obligatory that the membrane inside the hydrophore tank strictly correspond to hygienic standarts.

Bestank potable water tank series provide a high hygienic standarts to its users. The membrane used inside the Bestank Tanks corresponds to all European Union and USA potable water hygienic standarts and all the membranes are made in Italy completely. Furthermore, the only point where the water touches the tank, inlet-outlet, is the flange cover and connector which are made of stainless steel or electro galvanized.

Bestank hydrophore tanks are available in 8 bar- 10 bar-16 bar and 25 bar which can be used in combined with irrigating pumps, centrifugal pumps and other hydrophore systems in a safe way....

人类离不开干净卫生的水，
BESTANK供水系列压力罐
配备不锈钢法兰，配置了符合
欧洲和美国多项环保水质认
证的丁基胶囊.水全部储存在
胶囊里，不跟罐体直接接触，
保证了整个供水系统的水质
卫生.同时BESTANK拥有不
同系列的压力等级：10 Bar，
16Bar，25bar压力罐；可配
合不同的水泵系列，能在系统
中起到更好的稳压增压作用。

Accessories / 附件

BESTANK offers high quality EPDM / Butly Membrane as accessories
BESTANK提供高质量EPDM和丁基胶气囊等配件



Code 型号	Product Name 产品名称	Volume 容积
BEM-I-2-3	2-3 lt EPDM / Butly Membrane	2-3 LT
BEM-I-5-8	5-8 lt EPDM / Butly Membrane	5-8 LT
BEM-I-8-12	8-12 lt EPDM / Butly Membrane	8-12 LT
BEM-I-18-24	18-24lt EPDM / Butly Membrane	18-24 LT
BEM-I-24	24lt EPDM / Butly Membrane	24 LT
BEM-I-35-50	35-50lt EPDM / Butly Membrane	35-50 LT
BEM-I-50-80	50-80lt EPDM / Butly Membrane	50-80 LT
BEM-I-80-100	80-100lt EPDM / Butly Membrane	80-100 LT
BEM-I-100-150	100-150lt EPDM / Butly Membrane	100-150 LT
BEM-I-150-200	150-200K EPDM / Butly Membrane	150-200 LT
BEM-I-200-300	200-300lt EPDM / Butly Membrane	200-300 LT
BEM-I-500-750	500-750K EPDM / Butly Membrane	500-750 LT
BEM-I-1000-2000	1000-2000U EPDM / Butly Membrane	1000-2000 LT

BesTank®

International



Horizontal Tanks 卧式



Vertical Tanks Without Leg 立式无支架



Vertical Tanks With Leg 立式含三脚支架

SPECIFICATIONS

Tank Metal Body

- Changeable membrane with a screw connection flange cover
- Flange connection made of stainless steel or galvanized material
- Resistant up to 8/10/16/25 bars
- Outer surface with Epoxy powder paint

Membranes

- High quality EPDM membranes, hygienic certified, approved by European Union and USA Institutions
- DIN 4807-3, NSF-61, WRAS, BS-6920 certified and other quality certificates available

Option: Butly membranes available upon request

Colour;

Original Colour; Blue - RAL 5015

供水系列压力罐

BESTANK (技术参数与配置)

压力罐 欧标

- *罐体底部采用法兰和螺丝连接, 方便更换气囊
- *法兰和出水口连接件采用高端不锈钢材质
- *承压等级分为8BAR 10BAR 16BAR 25BAR
- *罐体符合欧洲CE标准
- *可根据要求配置碳钢法兰

压力罐国标

配置欧洲顶级品质意大利进口高科技内胆, 超强任性和超长使用寿命. 罐体按照中国D1/D2级压力容器制造, 安全性能符合TSG21-2016国定式压力容器安全技术监督规程. 根据客户项目需求不同, 压力罐可选择欧标或国标标准。

气囊

- *采用高质量的意大利EPDM气囊, 符合多项欧洲和美国等国际顶级饮用水标准。
- *气囊符合欧洲DIN4807-3美国NSF61, 英国WRAS, 新加坡BS-6920, 中国饮用水卫生许可批件等。

压力罐颜色

- *蓝色RAL5015



Changeable Mebrane Potable Water Pressure Tank Series

8 bar / 10 bar / 16 bar / 25 bar

Horizontal Tanks / 卧式

	L	Bar	D	H		
Model 型号	Capacity 容 积	Pressure 最大工作压力	length 直 径	Height 高 度	Pre. Charge Pressure 预充压力	Connection 接口
BHT-19H-PW	19 LT	8-10-16-25	310 mm	385 mm	2 bar	1" BSP / NPT
BHT-24H-PW	24 LT	8-10-16-25	340 mm	430 mm	2 bar	1" BSP / NPT
BHT-36H-PW	36 LT	8-10-16-25	400 mm	450 mm	2 bar	1" BSP / NPT
BHT-50H-PW	50 LT	8-10-16-25	400 mm	610 mm	2 bar	1" BSP / NPT
BHT-60H-PW	60 LT	8-10-16-25	440 mm	730 mm	2 bar	1" BSP / NPT
BHT-80H-PW	80 LT	8-10-16-25	520 mm	805 mm	2 bar	1" BSP / NPT
BHT-100H-PW	100 LT	8-10-16-25	550 mm	820 mm	4 bar	1" BSP / NPT

Vertical Tanks Without Leg / 立式无支架

	L	Bar	D	H		
Model 型号	Capacity 容 积	Pressure 最大工作压力	Diameter 直 径	Height 高 度	Pre. Charge Pressure 预充压力	Connection 接口
BHT-2V-PW	2 LT	8-10-16-25	160 mm	270 mm	2 bar	3/4" BSP / NPT
BHT-5V-PW	5 LT	8-10-16-25	160 mm	315 mm	2 bar	3/4" BSP / NPT
BHT-8V-PW	8 LT	8-10-16-25	200 mm	370 mm	2 bar	3/4" BSP / NPT
BHT-12V-PW	12 LT	8-10-16-25	240 mm	380 mm	2 bar	3/4" BSP / NPT
BHT-19V-PW	19 LT	8-10-16-25	270 mm	385 mm	2 bar	1" BSP / NPT
BHT-24V-PW	24 LT	8-10-16-25	300 mm	430 mm	2 bar	1" BSP / NPT
BHT-240S-PW	24 LT	8-10-16-25	350 mm	325 mm	2 bar	1" BSP / NPT
BHT-36V-PW	36 LT	8-10-16-25	350 mm	450 mm	2 bar	1" BSP / NPT
BHT-50V-PW	50 LT	8-10-16-25	350 mm	610 mm	2 bar	1" BSP / NPT
BHT-60V-PW	60 LT	8-10-16-25	380 mm	650 mm	2 bar	1" BSP / NPT




Vertical Tanks With Leg / 立式含三脚支架

	L	Bar	D	H		
Model 型号	Capacity 容 积	Pressure 最大工作压力	Diameter 直 径	Height 高 度	Pre. Charge Pressure 预充压力	Connection 接口
BHT-36VL-PW	36LT	8-10-16-25	350 mm	585 mm	2 bar	1" BSP / NPT
BHT-50VL-PW	50 LT	8-10-16-25	350 mm	760 mm	2 bar	1" BSP / NPT
BHT-60VL-PW	60 LT	8-10-16-25	380 mm	870 mm	2 bar	1" BSP / NPT
BHT-80VL-PW	80 LT	8-10-16-25	425 mm	930 mm	2 bar	1" BSP / NPT
BHT-100VL-PW	100 LT	8-10-16-25	460 mm	990 mm	4 bar	1" BSP / NPT
BHT-150VL-PW	150 LT	8-10-16-25	500 mm	1090 mm	4 bar	1" BSP / NPT
BHT-200VL-PW	200 LT	8-10-16-25	600 mm	1120 mm	4 bar	1-1/4" BSP / NPT
BHT-300VL-PW	300 LT	8-10-16-25	640 mm	1250 mm	4 bar	1-1/4" BSP / NPT
BHT-500VL-PW	500 LT	8-10-16-25	750 mm	1490 mm	4 bar	1-1/4" BSP / NPT
BHT-750VL-PW	750 LT	8-10-16-25	800 mm	1920 mm	4 bar	2" BSP / NPT
BHT-850VL-PW	850 LT	8-10-16-25	800 mm	2020 mm	4 bar	2" BSP / NPT
BHT-1000VL-PW	1000 LT	8-10-16-25	800 mm	2280 mm	4 bar	2" BSP / NPT
BHT-1500VL-PW	1500 LT	8-10-16-25	960 mm	2350 mm	4 bar	2" BSP / NPT
BHT-2000VL-PW	2000 LT	8-10-16-25	1100 mm	2450 mm	4 bar	2" BSP / NPT
BHT-2500VL-PW	2500 LT	8-10-16-25	1200 mm	2500 mm	4 bar	3" BSP / NPT
BHT-3000VL-PW	3000 LT	8-10-16-25	1350 mm	2600 mm	4 bar	3" BSP / NPT
BHT-4000VL-PW	4000 LT	8-10-16-25	1450 mm	3100 mm	4 bar	3" BSP / NPT
BHT-5000VL-PW	5000 LT	8-10-16-25	1500 mm	3670 mm	4 bar	3" BSP / NPT
BHT-6000VL-PW	6000 LT	8-10-16-25	1500 mm	4050 mm	4 bar	3" BSP / NPT
BHT-8000VL-PW	8000 LT	8-10-16-25	1600 mm	4760 mm	4 bar	3" BSP / NPT
BHT-10000VL-PW	10000 LT	8-10-16-25	1600 mm	5900 mm	4 bar	3" BSP / NPT



COLOUR

Original	RAL 5015
Optional	RAL 6016
Optional	RAL 1013
Optional	RAL 3020

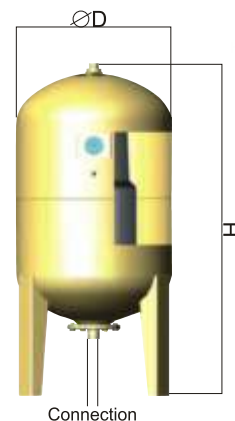

SUPERIOR QUALITY



High Quality Standards In Production

- Pressurized metal tank production according to European Union standards PED-CE;
- Fully automatic-robotic painting system ;
- Italian production-low gas permeability special design Butyl/EPDM membrane ;
- Stainless steel or galvanized connecton nipple

BESTANK采用先进的全自动流水线生产工艺，高品质高效率！

BESTANK拥有齐全的系列产品从2-40000L不等容积的压力罐和内胆等相产品。

Large Product Range

- Non-replaceable membrane and changeable membrane tanks (water pump-booster tanks, expansion tanks, solar tanks, reverse osmosis tanks, anti-water hammer tanks) ;
- Volume from 0.16 liter up to 10.000 liter ; 6 bar-8 bar-10 bar-16 bar and 25 bar operating pressure ;
- Additionally, Epdm / Butyl membranes, manometers, pressure switches, 5-way brass connections, flexible connection hoses etc..



Fast Product Delivery

- High ability to produce fast & high quality products, thanks to high production capacity and high production automation in China, the most advanced production facility ;
- Detailed stock following capability for final products, raw materials and semi finished parts by help of effective ERP program usage ;
- By computer-controlled order tracking system, detailed analysis and fast delivery of all customer orders

BESTANK拥有先进的管理模式结合ERP给客户提供更高效的服务体验。


BESTANK支持OEM合作可根据客户要求设计定制产品。

Solution-Oriented And Continuous Innovation

- Constantly new product design & production capability by help of R & D investments ;
- Ability to make changes on the products according to customer's demands ;
- Ability to produce OEM products



SUPERIOR QUALITY

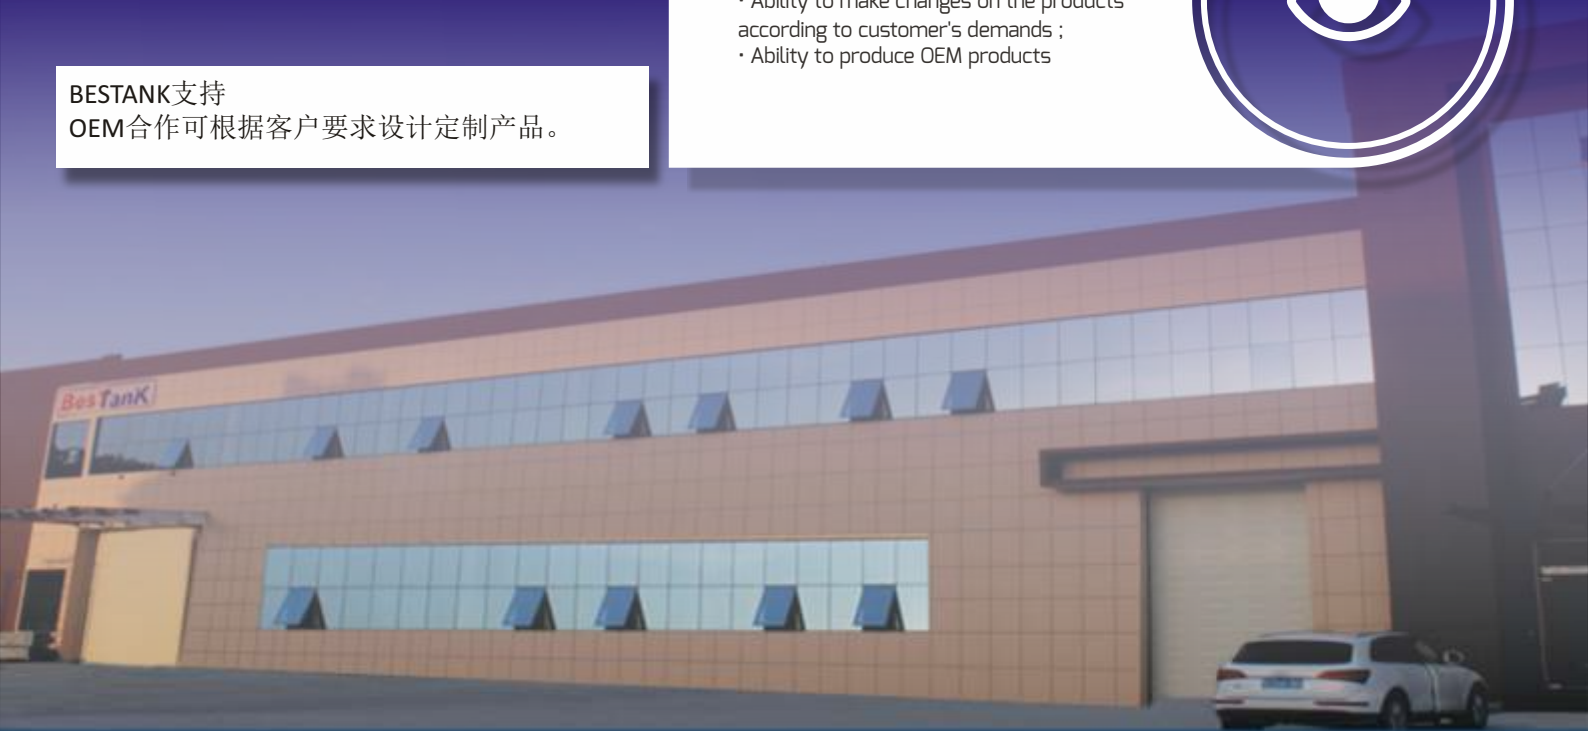

BesTank[®]
International



BESTANK INTERNATIONAL

贝斯特国际