

## Sovello Pure Power X Series

Low Voltage Configuration

Made in Germany

Sovello Pure Power solar modules are produced in Germany according to the highest quality standards in one of the world's most modern, fully integrated solar factories. Our modules are remarkably efficient, easy to operate, and are manufactured in a particularly environmentally friendly way thanks to the STRING RIBBON™ wafers, which feature excellent specific power output and smallest carbon footprint.

- › Best energy efficiency with a high level of specific energy yield
- › Particularly narrow output tolerance with at least 100% guaranteed nominal output
- › Easy installation thanks to torsion-resistant, double-walled module frames and low total module weight
- › Maximum level of security thanks to a 10-year guarantee on workmanship and on at least 90% (80%) of the listed nominal output after 10 (25) years
- › Most sustainable module – quickest energy payback compared to other products of its kind
- › Embedded label for easy identification of the installed modules; required by insurance companies in some countries



\* For the detailed guarantee terms, please contact Sovello or see our Web site [www.sovello.com](http://www.sovello.com).  
The modules are certified and approved in accordance with IEC 61215 and DIN 61730, as well as with CE guidelines. STRING RIBBON is a brand of Evergreen Solar, Inc. Evergreen Solar's wafer manufacturing process is patent protected in the USA and other countries.

## Electrical Nominal Values

### Standard Test Conditions (STC)<sup>1</sup>

		SV-X-200	SV-X-205	SV-X-210	SV-X-215
		Low Voltage Configuration			
Nominal Power <sup>2</sup>	W	200	205	210	215
Output Tolerance	W	0/+5	0/+5	0/+5	0/+5
P <sub>mpp, max.</sub>	W	204.9	209.9	214.9	219.9
P <sub>mpp, min.</sub>	W	200.0	205.0	210.0	215.0
Module Efficiency	%	12.7	13.1	13.4	13.7
U <sub>mpp</sub>	V	18.3	18.4	18.5	18.5
I <sub>mpp</sub>	A	10.93	11.15	11.36	11.63
U <sub>oc</sub>	V	22.9	23.0	23.1	23.2
I <sub>sc</sub>	A	11.71	11.87	12.02	12.18

### Nominal Operating Cells Temperature Conditions (NOCT)<sup>3</sup>

T NOCT	°C	45.2	45.2	45.2	45.2
P <sub>max</sub>	W	146.1	149.8	153.4	157.1
U <sub>mpp</sub>	V	16.7	16.8	16.9	16.9
I <sub>mpp</sub>	A	8.71	8.89	9.06	9.27
U <sub>oc</sub>	V	21.1	21.2	21.3	21.4
I <sub>sc</sub>	A	9.49	9.62	9.74	9.87

<sup>1</sup> STC: 1,000 W/m<sup>2</sup> irradiance on module level, module temperature 25 °C and spectral distribution of irradiance acc. to Air Mass 1.5

<sup>2</sup> Power rating at standard test conditions (STC)

<sup>3</sup> NOCT: Equilibrium temperature at 800 W/m<sup>2</sup> irradiance on module level, air temperature 20 °C, wind velocity 1 m/s

### Temperature Coefficients

$\gamma$ P <sub>mpp</sub>	(%/°C)	-0.45
$\beta$ U <sub>mpp</sub>	(%/°C)	-0.42
$\alpha$ I <sub>mpp</sub>	(%/°C)	-0.03
$\beta$ U <sub>oc</sub>	(%/°C)	-0.33
$\alpha$ I <sub>sc</sub>	(%/°C)	0.06

### System Design

Maximum countercurrent flow	30 A
Maximum system voltage	1,000 V

### Poor lighting conditions

In case of an irradiance of 200 W/m<sup>2</sup> and a module temperature of 25 °C, the reduction of the relative level of efficiency will be less than 4% with regard to STC conditions.


### Mechanical Stability

High level of guaranteed durability in wind and snow up to 5.4 kN/m<sup>2</sup>.

 ELECTRICAL EQUIPMENT  
CHECK WITH YOUR INSTALLER

 **Mixed Sources**  
Product group from well-managed forests  
and other controlled sources  
www.fsc.org Cert no. GFA-COC-001552  
©1996 Forest Stewardship Council

## Mechanical Specifications

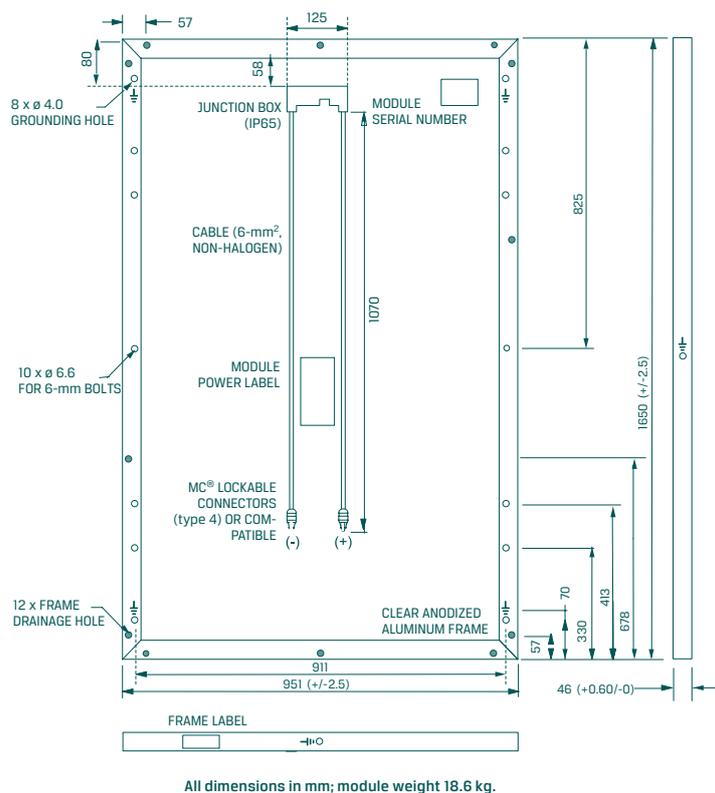

This product was manufactured using the following materials: 114 polycrystalline silicon solar cells, anti-reflective tempered solar glass, EVA encapsulant, polymer back-skin, and a double-walled, anodized aluminum frame. The product's packaging has been tested in accordance with standard 2B of the International Safe Transit Association (ISTA). All specifications in this product data sheet conform to EN 50380. For more information on the approved installation and use of this product, please see the Sovello safety, installation, and operating manual.

Due to continuous innovation, research, and product improvement, the specifications in this product information sheet are subject to change without prior notice. No legal claims may be made based on this product data sheet. Sovello assumes no liability with regard to the use of the information found here or the consequences thereof.

### Partners

Sovello AG

Headquarters:  
Sonnenallee 14-30, 06766 Bitterfeld-Wolfen, Germany  
P +49-3494-6664-0 F +49-3494-6664-1011  
request@sovello.com  
www.sovello.com

Customer Service:  
Sonnenallee 14-30, 06766 Bitterfeld-Wolfen, Germany  
P +49-3494-6664-1555 F +49-3494-6664-1011  
customer-service@sovello.com

