



Smart  
connections.

## Data sheet

PIKO 10-20

## PIKO inverter: flexible, communicative and practical

### Flexible in use

3-phase feed-in

Up to 3 MPP trackers suited to the layout of almost all roofs

Wide input voltage range for flexible string design

### Smart connected

Standard integrated communication package with data logger, system monitoring and Webserver

Free Solar Portal and Solar App for monitoring the PV system

Many interfaces without additional components: Display, network and control interfaces

### Smart performance

Fast, self-learning shadow management – adapts individually to the installation site

Dynamic active power control and energy consumption measurement via optional KOSTAL Smart Energy Meter

Integrated KOSTAL Smart AC Switch takes the place of the external circuit breaker (only Piko 15-20)


### Easy to install

Simple device configuration using commissioning wizard


Integrated switch contact for self-consumption optimisation

Integrated electronic DC switch

Quick, uncomplicated and tool-free AC and DC installation

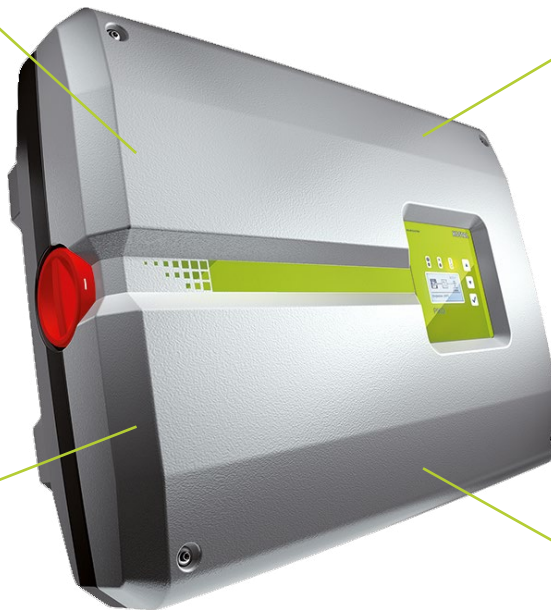

## PIKO 10-20: compact and rapidly deployable

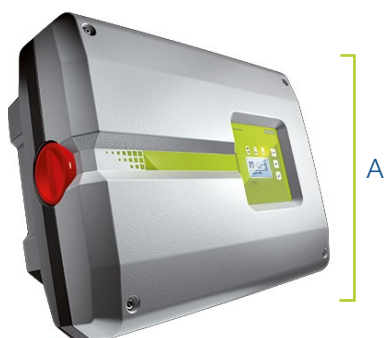

PIKO 10-12: (A) 44.5 cm, (B) 58.0 cm, (C) 24.8 cm  
PIKO 15-20: (A) 54.0 cm, (B) 70.0 cm, (C) 26.5 cm

## Technical data PIKO 10-20

	Power class		10	12	15	17	20
Input side (DC)	Max. PV power <sup>1)</sup> (cos φ = 1)	kWp	15	18	22.5	25.5	30
	Nominal DC power	kW	10.8	12.3	15.3	17.4	20.4
	Rated input voltage (U <sub>DC,r</sub> )	V	680				
	Start-up input voltage (U <sub>DCstart</sub> )	V	180				
	Input voltage range (U <sub>DCmin</sub> - U <sub>DCmax</sub> )	V	160...1000				
	MPP range at rated output in single-tracker operation (U <sub>MPPmin</sub> - U <sub>MPPmax</sub> )	V	527...800	626...800	-	-	-
	MPP range at rated output in two-tracker operation (U <sub>MPPmin</sub> - U <sub>MPPmax</sub> )	V	sym: 290/290...800 unsym: 390/250...800	sym: 345/345...800 unsym: 490/250...800	390...800	440...800	515...800
	MPP range at rated output in three-tracker operation (U <sub>MPPmin</sub> - U <sub>MPPmax</sub> )	V	-	-	sym: 260/260/260...800 unsym: 325/325/250...800	sym: 290/290/290...800 unsym: 375/375/250...800	sym: 345/345/345...800 unsym: 450/450/250...800
	MPP working voltage range (U <sub>MPPworkmin</sub> - U <sub>MPPworkmax</sub> )	V	180...800				
	Max. working voltage (U <sub>DCworkmax</sub> )	V	800				
	Max. input current (I <sub>DCmax</sub> ) per DC input		sym: 18/18 unsym: 20/10		sym: 20/20/20 unsym: 20/20/10		
	Max. input current with parallel connection (DC1+DC2 / DC3 input)	A	36/-		40/20		
	Max. PV short-circuit current (I <sub>SC_PV</sub> ) per DC input	A	25				
	Number of DC inputs		2		3		
	Number of independent MPP trackers		2		3		
	Output side (AC)	Rated power. cos φ = 1 (P <sub>AC,r</sub> )	kW	10	12	15	17
Max. apparent output power. cos φ · adj		kVA	10	12	15	17	20
Min. output voltage (U <sub>ACmin</sub> )		V	184				
Max. output voltage (U <sub>ACmax</sub> )		V	264.5				
Rated output current (I <sub>AC,r</sub> )		A	14.6	17.4	21.7	24.6	29.0
Max. output current (I <sub>ACmax</sub> )		A	16.2	19.3	24.2	27.4	32.2
Short-circuit current (peak/RMS)		A	25/16.6	27.4/16.7	42/28.5	41.3/29	51/36.5
Grid connection			3N~. 400V. 50 Hz				
Rated frequency (f <sub>r</sub> )		Hz	50				
Min./max. grid frequency (f <sub>min</sub> /f <sub>max</sub> )		Hz	47 / 51.5				
Setting range of the power factor (cos φ <sub>AC,r</sub> )			0.8...1...0.8				
Power factor for rated power (cos φ <sub>AC,r</sub> )			1				
Max. THD	%	3					
Standby (night-time consumption)	W	1.8					
η	Max. efficiency	%	97.7	97.7	98.0	98.0	98.0
	European efficiency	%	97.1	97.1	97.2	97.3	97.3
	MPP adjustment efficiency	%	99.9	99.9	99.9	99.9	99.9

Power class		10	12	15	17	20
System data	Topology: Without galvanic isolation – transformerless		✓			
	Protection class according to IEC 60529 (housing / fan)		IP 65 / IP 55			
	Protective class in accordance with IEC 62103		I			
	Overvoltage category in accordance with IEC 60664-1, input side (PV generator)		II			
	Overvoltage category in accordance with IEC 60664-1, output side (grid connection)		III			
	Degree of contamination		4			
	Environmental category (outdoor installation)		✓			
	Environmental category (indoor installation)		✓			
	UV resistance		✓			
	AC cable diameter (min-max)	mm	9...17			
	AC cable cross-section (min-max)	mm²	4...6	6...16		
	DC cable cross-section (min-max)	mm²	4...6			
	Max. fuse protection on output side		B25 / C25	B32 / C32		B40 / C40
	Internal operator protection in accordance with EN 62109-2		RCCB type B			
	Independent disconnection device according to VDE 0126-1-1		✓			
	Height/width/depth	mm (in)	445/580/248 (17.52/22.83/9.76)	540/700/265 (21.26/27.56/10.43)		
	Weight	kg (lb)	37.5 (82.67)	48.5 (106.9)		
	Cooling principle – regulated fans		✓			
	Max. air throughput	m³/h	2 x 48	2 x 84		
	Max. noise emission	dBA	44	56		
Ambient temperature	°C (°F)	-20...60 (-4...140)				
Max. installation altitude above sea level	m (ft)	2000 (6562)				
Relative humidity	%	4...100				
Connection technology, DC side		SUNCLIX plug				
Connection technology, AC side		Spring-type terminal strip				
Interfaces	Ethernet LAN (RJ45) / RS485 / S0		2 / 1 / 1			
	Analogue inputs		1			
	Potential-free contact for self-consumption control		1			
	KOSTAL Smart AC Switch		-	✓		
	Webserver (user interface)		✓			
	KOSTAL Smart Warranty / Warranty <sup>3)</sup>	Years	5 (2)			
	Optional warranty extension for (years)		5/10/15			
Directives/Certification <sup>2)</sup>		CE, GS, EN 62109-1, EN 62109-2, EN 60529, IEC 61683, CEI 0-21, EN 50438*, G83/2, IEC 61727, IEC 62116, RD 1699, TOR D4, UNE 206006 IN, UNE 206007-1 IN, UNE 217001 IN, UTE C15-712-1, VDE 0126-1-1, VDE-AR-N 4105				


Subject to technical changes. Errors excepted. You can find current information at [www.kostal-solar-electric.com](http://www.kostal-solar-electric.com). Manufacturer: KOSTAL Industrie Elektrik GmbH, Hagen, Germany

<sup>1)</sup> You should avoid operating the inverter continuously at above 110% of the DC rated output

<sup>2)</sup> Does not apply to all national annexes to EN 50438

<sup>3)</sup> KOSTAL Smart Warranty: 5-year warranty only after registration in the KOSTAL Solar online shop

# PIKO inverters - the new generation

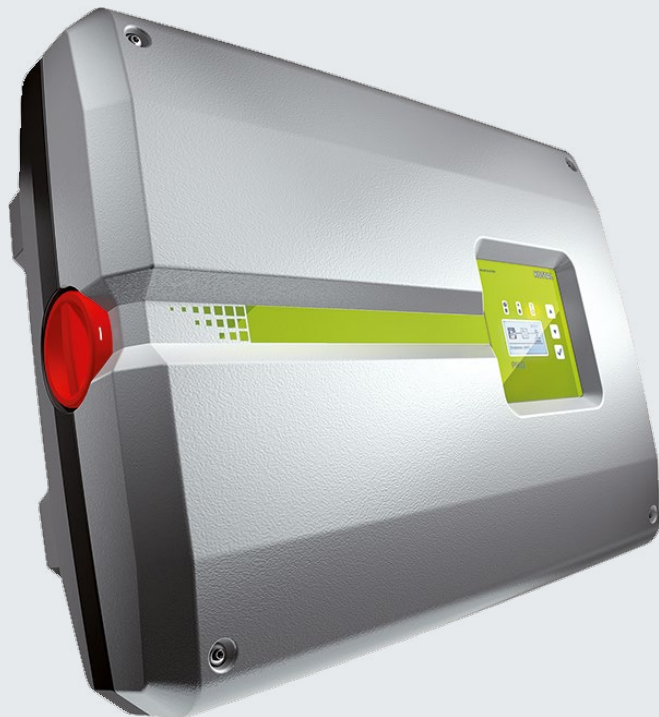

10


12

15


17

20


PIKO 10

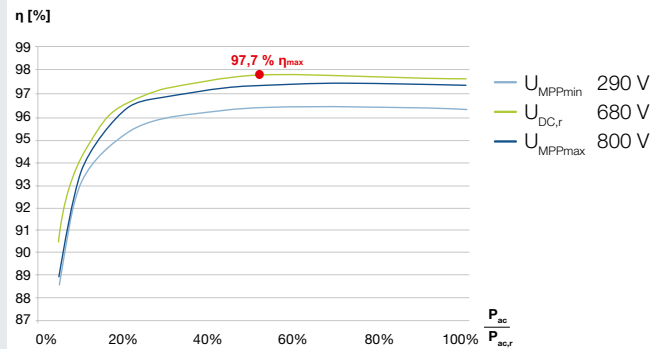


PIKO 12

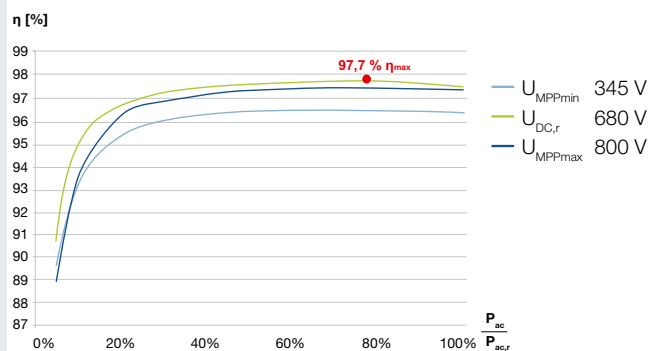


PIKO 15

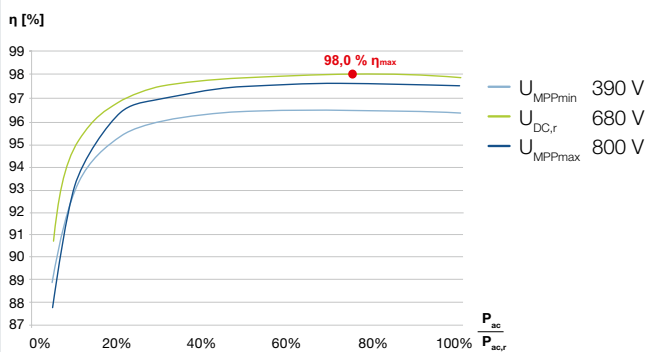

PIKO 17

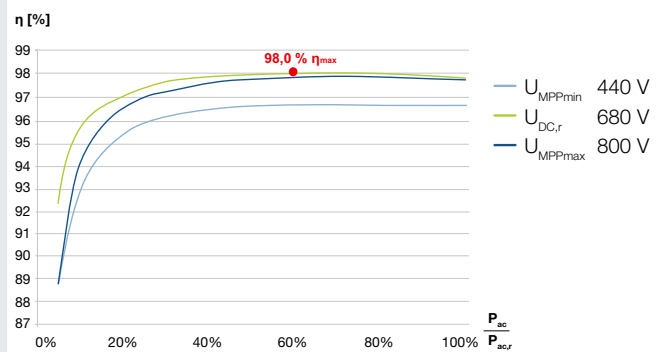

PIKO 20

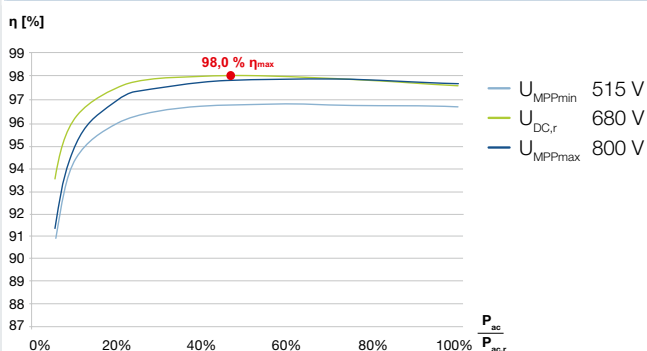

## Services for our products

### FAQs:

[kostal-solar-electric.com/service-support](http://kostal-solar-electric.com/service-support)

Product registration, KOSTAL Smart Warranty, warranty extension or purchase of accessories:  
[shop.kostal-solar-electric.com](http://shop.kostal-solar-electric.com)

Get in touch: [service-solar@kostal.com](mailto:service-solar@kostal.com)



KOSTAL Solar Electric GmbH  
Hanferstr. 6  
79108 Freiburg i. Br.  
Deutschland  
Telefon: +49 761 47744 - 100  
Fax: +49 761 47744 - 111

KOSTAL Solar Electric Ibérica S.L.  
Edificio abm  
Ronda Narciso Monturiol y Estarriol, 3 Torre  
B, despachos 2 y 3  
Parque Tecnológico de Valencia  
46980 Valencia  
España  
Teléfono: +34 961 824 - 934  
Fax: +34 961 824 - 931

KOSTAL Solar Electric France SARL  
11, rue Jacques Cartier  
78280 Guyancourt  
France  
Téléphone: +33 1 61 38 - 4117  
Fax: +33 1 61 38 - 3940

KOSTAL Solar Electric Hellas E.Π.Ε.  
47 Steliou Kazantzidi st., P.O. Box: 60080 1st  
building – 2nd entrance  
55535, Pilea, Thessaloniki  
Ελλάδα  
Τηλέφωνο: +30 2310 477 - 550  
Φαξ: +30 2310 477 - 551

KOSTAL Solar Electric Italia Srl  
Via Genova, 57  
10098 Rivoli (TO)  
Italia  
Telefono: +39 011 97 82 - 420  
Fax: +39 011 97 82 - 432

KOSTAL Solar Elektrik Turkey  
Mahmutbey Mah. Taşocağı Yolu Cad.  
No:3 (B Blok), Ağaoğlu My Office 212  
Kat:16, Ofis No:269  
Bağcılar - İstanbul / Türkiye  
Telefon: +90 212 803 06 24  
Faks: +90 212 803 06 25

[www.kostal-solar-electric.com](http://www.kostal-solar-electric.com)