


SMART MODULE ADD-ON PLATFORM

The TS4-R is an add-on solution that brings smart module functionality to standard PV modules, for upgrading underperforming PV systems or adding smart features to new installations. The TS4-R add-on base can be matched with one of several electronic covers to address a range of functions and budgets. Together they form a new generation of module-level power electronics: flexible, replaceable, upgradeable, and accompanied by a powerful PV 2.0 communication backend.

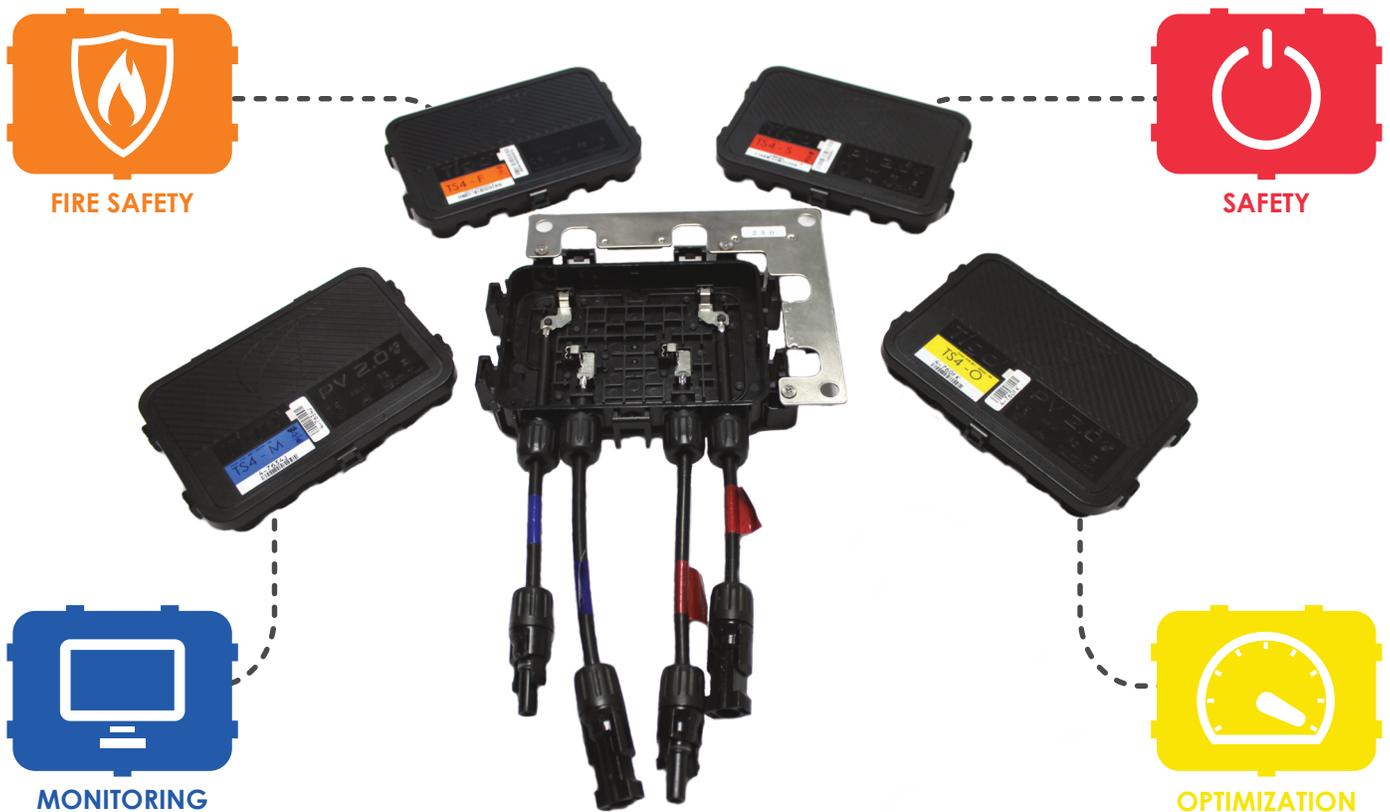


ADD-ON MODULAR PLATFORM

TS4-R

Type: TS4-R (base up to 1500V)

ADD-ON BASE

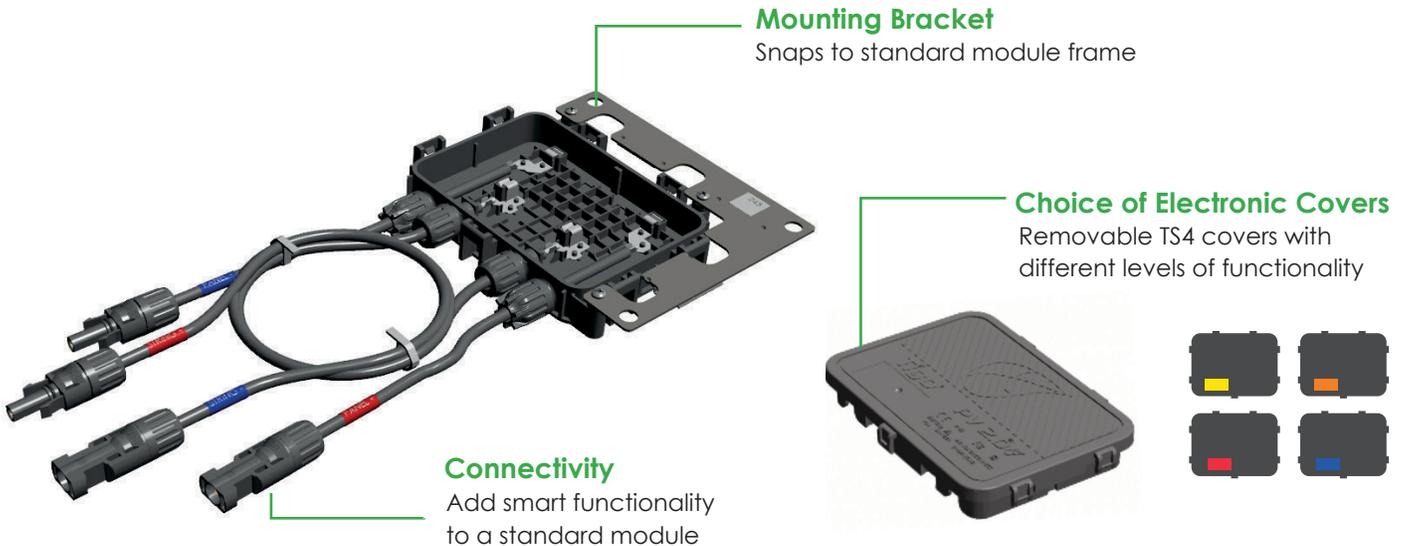

MECHANICAL SPECIFICATIONS

Mechanical

Operating Temperature Range -40°C to +70°C (-40°F to +158°F), RH < 85%

Storage Temperature Range -40°C to +70°C (-40°F to +158°F), RH < 60%

Cooling Method Natural Convection

Dimensions (with cover) 178.5mm x 134mm x 25.5mm

Weight (base and cover) 610g (M or S cover), 670g (O cover)

Outdoor Rating IP68, NEMA 3R

Cabling

Type H1Z2Z2-K

Output Cable Length Standard 1.0m, other lengths on request

Rating Options
1000V rated
1500V rated


Cable Cross-Section 6.3 ± 0.3mm

Connectors MC4, MC4 comparable, EVO2

UV Resistance 500hr with UV light between 300-400nm @65°C

Maximum String Voltage 1500V UL/IEC¹

¹ All TS4 covers are 1500V compatible. Specify max system voltage when ordering TS4-R bases for appropriate cables & connectors.

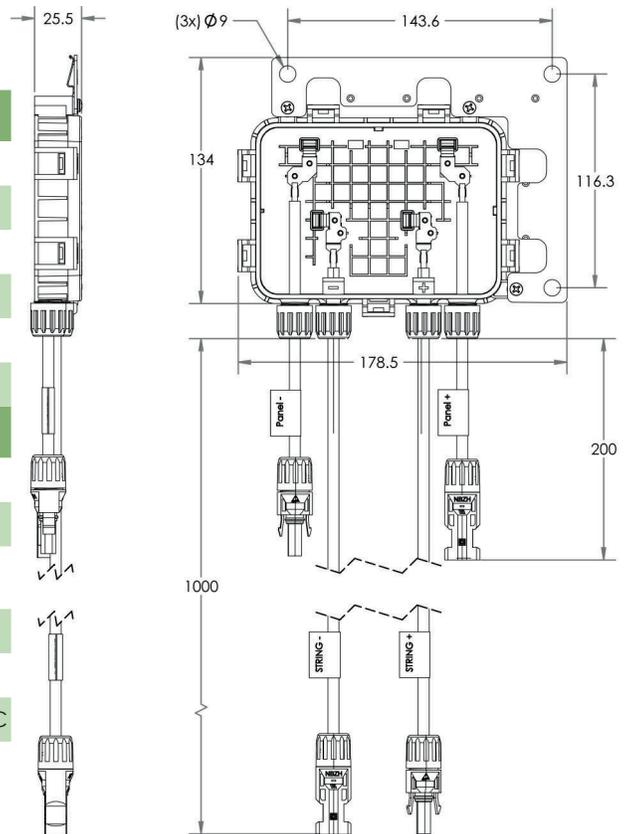

*All dimensions are in mm

UPGRADE YOUR FLEET WITH TS4-R

Tigo has expanded its smart module add-on platform to provide multiple levels of customization. With a universal base and a range of covers containing the Flex MLPE, TS4 increases your freedom of choice when selecting features for a particular project and budget. TS4 add-on cover options include monitoring, safety, and optimized performance features.

OPTIMIZATION

TS4-R-O



Monitoring



Safety



Optimization

- Shade and mismatch tolerance
- Enhanced energy yield
- Greater design flexibility

- Maximized roof usage
- Plus all the benefits of Safety and Monitoring

SAFETY

TS4-R-S



Monitoring



Safety

- NEC 2014 & 2017 690.12 rapid shutdown compliant
- Module-level deactivation

- Automatic or manual shutdown
- Plus all the benefits of Monitoring

FIRE SAFETY

TS4-R-F



Fire Safety

- NEC 2014 & 2017 690.12 rapid shutdown compliant
- Module-level deactivation

- Automatic or manual shutdown
- PLC signaling

MONITORING

TS4-R-M



Monitoring

- Reduced O&M costs
- PV-2.0 data synchronization
- Module bar code tracking

- CRM integration
- Warranty tracking
- Fleet management

TS4 COVERS



MONITORING
TS4-R-M



FIRE SAFETY
TS4-R-F



SAFETY
TS4-R-S



OPTIMIZATION
TS4-R-O

ELECTRICAL RATINGS

INPUT				
Rated DC Input Power	475W	475W	475W	475W
Maximum Input Voltage	90V	90V	90V	90V
Maximum Continuous Input Current (I_{MAX})	12A	12.5A	12A	12A
Minimum V_{MP}	16V	16V	16V	16V
OUTPUT				
Output Power Range	0 - 475W	0 - 475W	0 - 475W	0 - 475W
Output Voltage Range	0 - V_{OC}	0 - V_{OC}	0 - V_{OC}	0 - V_{OC}
Communication Type	Wireless	PLC	Wireless	Wireless
Rapid Shutdown UL Listed ² (NEC 2014 & 2017 690.12)	No	Yes	Yes	Yes
Impedance Matching Capability	No	No	No	Yes
Output Voltage Limit	No	No	No	No
Maximum System Voltage	1500V	1500V	1500V	1500V

¹ Approximate V_{OC} of 75V at STC.

² TS4-R-S and TS4-R-O require Cloud Connect Advanced (CCA) and TAP/Gateway for rapid shutdown compliance. TS4-R-F requires RSS Transmitter.

ORDERING INFORMATION

Add-on Unit	
TS4-R	1000V TÜV / UL, MC4 comparable, 1m cable
Connector Options	
1000V TÜV / UL	MC4, EVO2
1500V TÜV / UL	EVO2, MC comparable
Pre-Assembled	Features
TS4-R-M	Monitoring
TS4-R-F	Fire Safety
TS4-R-S	Safety
TS4-R-O	Optimization

For sales info:

sales@tigoenergy.com or 1.408.402.0802

For product info:

Visit www.tigoenergy.com/products

For technical info:

support.tigoenergy.com

For additional info and product selection assistance, use Tigo's online design tool at www.tigoenergy.com/design

All TS4 covers are 1500V compatible. Specify max system voltage when ordering TS4-R bases for appropriate cables & connectors.



Photovoltaic Rapid Shutdown System Equipment, QJJW

