

SF-M18/144

565-580W

182±1.5×91±1.5mm

Cells 144

Monocrystalline

N-TYPE Half-Cell Module

Max Power Out: 580W

Max Efficiency: 22.45%

Power Tolerance: 0~+5W



SMBB Technology

Better light trapping and current collection to improve module power output and reliability



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Reduced Hot Spot Loss

Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




High Energy Generation, Low LCOE

Low Pmax temp coefficient increases energy production

Superior Warranty

- 15-year material & technology warranty
- 30-year linear power output warranty

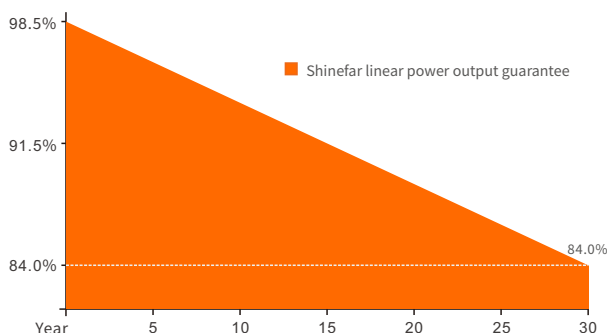


Comprehensive Products and System Certificates

- IEC/EN61215-1:2021 & IEC/EN61215-2:2021
- IEC/EN61730-1:2016 & IEC/EN61730-2:2016
- UL61730-1:2017 & UL61730-2:2017
- UL61215-1:2017 & UL61215-2:2017
- IEC 61701:2020-Saltmist
- IEC 62716:2013-Ammonia
- IEC 62804:2020-PID
- IECCE Certificate Body (CB)
- UKCA:EN61730-2018
- ISO9001 & ISO14001 & ISO45001



Engineering Drawings

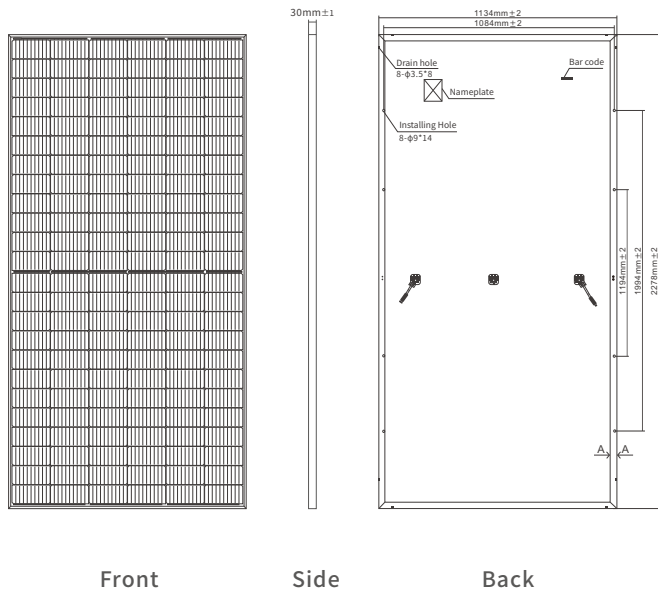

Structural Parameter

Dimensions of Module	2278×1134×30mm
Weight	26.5kg
Packing	37PCS/Pallet, 740PCS/40HQ
Glass	High Transparency Solar Glass 3.2mm
Backsheet	White
Frame	Black
J-Box	IP68 Rated
Cable	4.0mm ² , 300mm
Bypass Diodes	3PCS
Wind/ Snow Load	2400Pa/5400Pa
Connector	MC4 Compatible

Electrical Specification

(STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5G — NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s)

Module Type	SF-M18/144565		SF-M18/144570		SF-M18/144575		SF-M18/144580	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	565	423.19	570	426.93	575	430.68	580	434.42
Maximum Power Voltage (Vmp) [V]	42.43	39.67	42.59	39.82	42.75	39.97	42.91	40.12
Maximum Power Current (Imp) [A]	13.32	10.67	13.38	10.72	13.45	10.77	13.52	10.83
Open Circuit Voltage (Voc) [V]	50.35	47.08	50.50	47.22	50.65	47.36	50.80	47.50
Short Circuit Current (Isc) [A]	14.32	11.47	14.39	11.53	14.47	11.59	14.55	11.65
Module Efficiency [%]	21.87		22.07		22.26		22.45	
Cell Type [mm]	Mono 182±1.5×91±1.5, 144 Cells							
Operational Temperature [°C]	-40~+85°C							
Maximum System Voltage	1500V DC							
Max Series Fuse Rating	25A							

Temperature Ratings

Nominal Operating Cell Temperature	$45 \pm 2^{\circ}\text{C}$
Temperature Coefficient of Isc	$+0.05\%/^{\circ}\text{C}$
Temperature Coefficient of Voc	$-0.23\%/^{\circ}\text{C}$
Temperature Coefficient of Pmax	$-0.30\%/^{\circ}\text{C}$

Curve Diagram

