




SKYWORTH
Make Every Ray of Sunshine Count

High Efficiency Series-66 710-730W

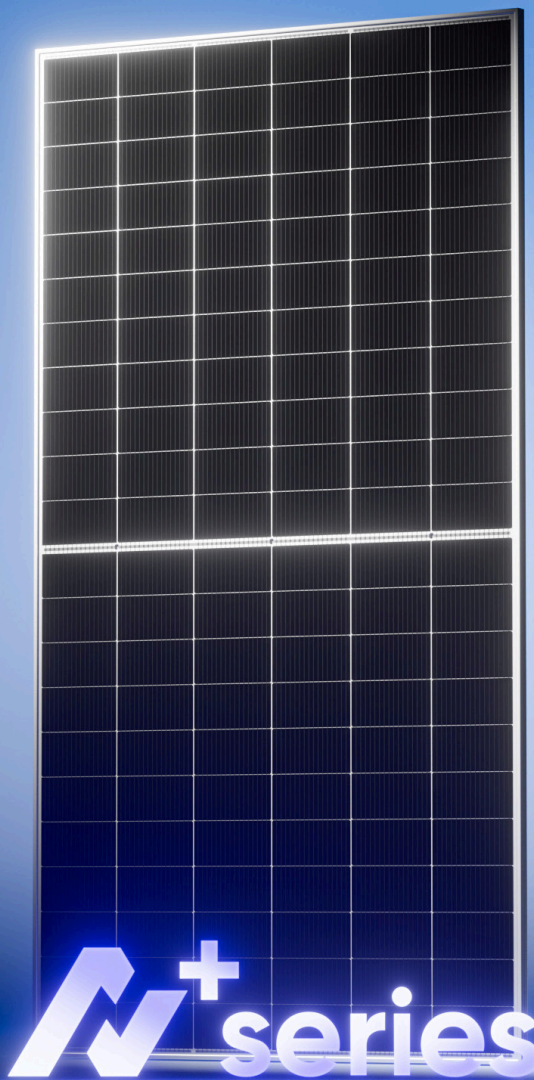

N+ series



Highly Anti PID

linear power warranty with first year $\leq 1\%$ degradation and an annual degradation rate of up to 0.4% after that



Better low irradiance response

Superior power generation under shading conditions



Highly reliable

15-year product warranty, 30-year linear power output warranty



Improvement in power generation performance

Conversion efficiency up to 23.6%



Bifacial Energy Yield | N-type Silicon Wafer

Bifacial rate of up to 80%, module additional power generation of up to 10% over regular modules

QUALITY SYSTEM

IEC 61215(2021), IEC 61730(2018)

ISO 9001:2015: Quality management systems

ISO 14001:2015: Environmental management systems


ISO 45001:2018: Occupational health and safety management systems

All Rights Reserved @Shenzhen Skyworth Photovoltaic Technology Co., LTD. Please refer to the latest version for any updates

Electrical Characteristics

Module Type	QM210 THCD-710-66	QM210 THCD-715-66	QM210 THCD-720-66	QM210 THCD-725-66	QM210 THCD-730-66
	STC	STC	STC	STC	STC
Maximum Power[W]	710	715	720	725	730
Maximum Power Voltage[V]	40.90	41.10	41.30	41.50	41.70
Maximum Power Current[A]	17.36	17.40	17.44	17.48	17.52
Open circuit voltage[V]	49.00	49.20	49.40	49.60	49.80
Short Circuit Current[A]	18.40	18.44	18.49	18.53	18.57
Module Efficiency	22.9%	23.1%	23.2%	23.4%	23.6%
Operating Temperature	-40°C~+85°C				
Maximum System Voltage	DC 1500V				
Maximum Series Fuse Rating	30A				
Power Tolerance[W]	0~+5W				
Voc Temperature Coefficient	-0.28%/°C				
Pmax Temperature Coefficient	-0.29%/°C				
Isc Temperature Coefficient	0.04%/°C				
Nominal Operating Cell Temperature	45±2°C				



Technical drawing

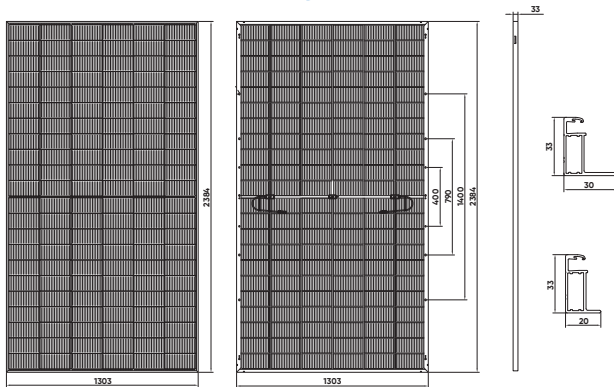


Mechanical Specifications

Solar Cells	132(66×2)
Dimension	2384×1303×33mm
Weight	37.9kg
Front Glass	2.0mm AR coated heat strengthened-Glass
Back Glass	2.0mm heat strengthened-Glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Output Cables	4mm ² (IEC),+300mm/-200mm or customize
Bifaciality	d 80%+5%

Characteristic

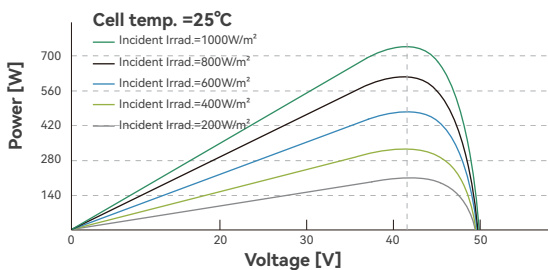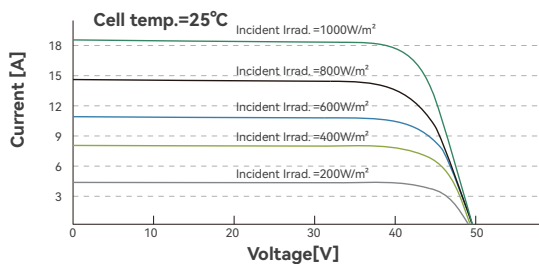

Linear Performance Warranty

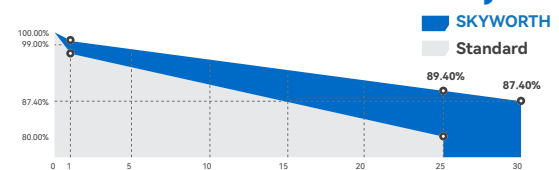

- 15 YEARS** 15-year product warranty
- 30 YEARS** 30-year linear power output warranty
- 0.4%** year 2-30 power degradation

Level

Fire Performance	C
Security Protection	Class II

Packing Configuration

Pallet	33pcs/Pallet
Container	594pcs/40HQ Container